

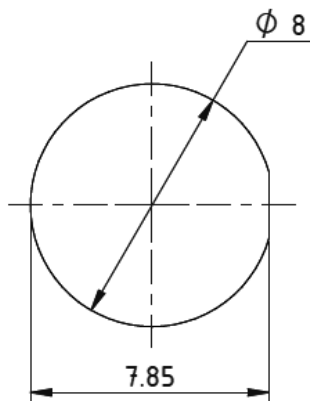
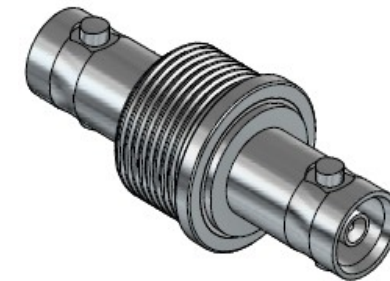


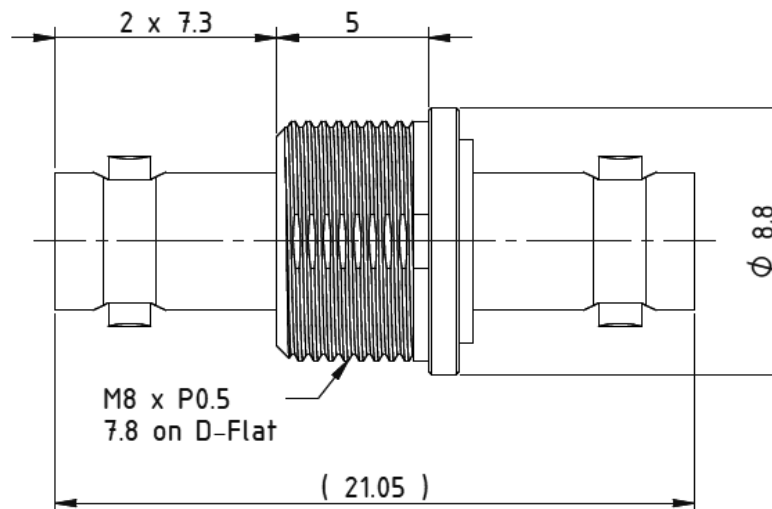

Recommended Panel Cut Out

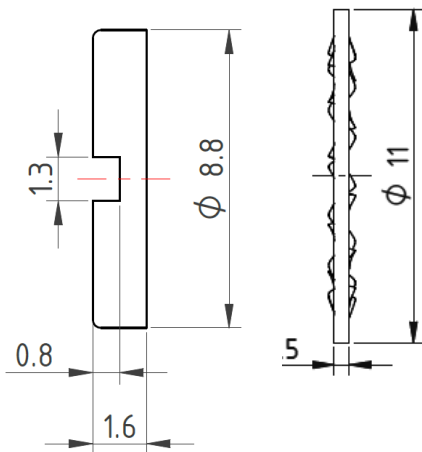

Finish [Unit of Plating Thickness Is in Micro Inch(μ)]

1. Nickel Plating Thk. : 50 μ "min. (Under Plating)

2. Gold Plating Thk. : 2 μ "min. (Over Finish 1)

8	Round Nut	Brass	Finish 1	HM08P05BN-9.8R	1
7	Lock Washer	S50C	Finish 1	WM08IFN-110	1
6	Inner Contact	BeCu	Finish 1/2	C-ATH00P0E3G	1
5	Insulator	PTFE	None	I-ATH00-B	2
4	Insulator	POM	None	I-ATH00-A	1
3	Interface Body	Brass	Finish 1	B-ATH00P0BN-03	1
2	Interface Body	Brass	Finish 1	B-ATH00P0BN-02	1
1	Connector Body	Brass	Finish 1	B-NPO925BN-01	1
ITEM	Description	Material	Finish	Part Number	QTY

TITLE	F-F Micro BNC Isolated bulkhead Adaptor with Nut&S/P Washer
RoHS Compliant	Cambridge Electronic Industries Ltd Denny Industrial Centre, Waterbeach, Cambs. CB25 9QR Tel: 01223 860041

1.2	Electrical Data Added	05/11/19
1.1	Nut Dia Chg to 8.8mm	17/10/19
1.0	Origin	15/10/19
ISSUE	CHANGE	DATE
Origin		
Drn.	P. Fayers	05/11/19
Chkd.		
Dwg. No.	C-SX-216 (NPO 925B)	

Electrical

Impedance	75Ω
Frequency Range	0 - 12GHz
Working Voltage	250Vrms
Dielectric Withstanding Voltage	750Vrms
Reflection Factor (VSWR)	1.21 (max) 0 - 6.0GHz 1.19 (max) 6.0 - 12GHz
Insulation Resistance	>1000M Ω

Material

Metal Parts	Brass / Ni
Centre Pin	BeCu / Ni / Au
Insulators	PTFE

Environmental

Temperature Range	-65 to +85°C
-------------------	--------------

Mechanical

Mating Cycles	500
---------------	-----

