


6 5 4 3 2 1

S-Parameter [Magnitude in dB]

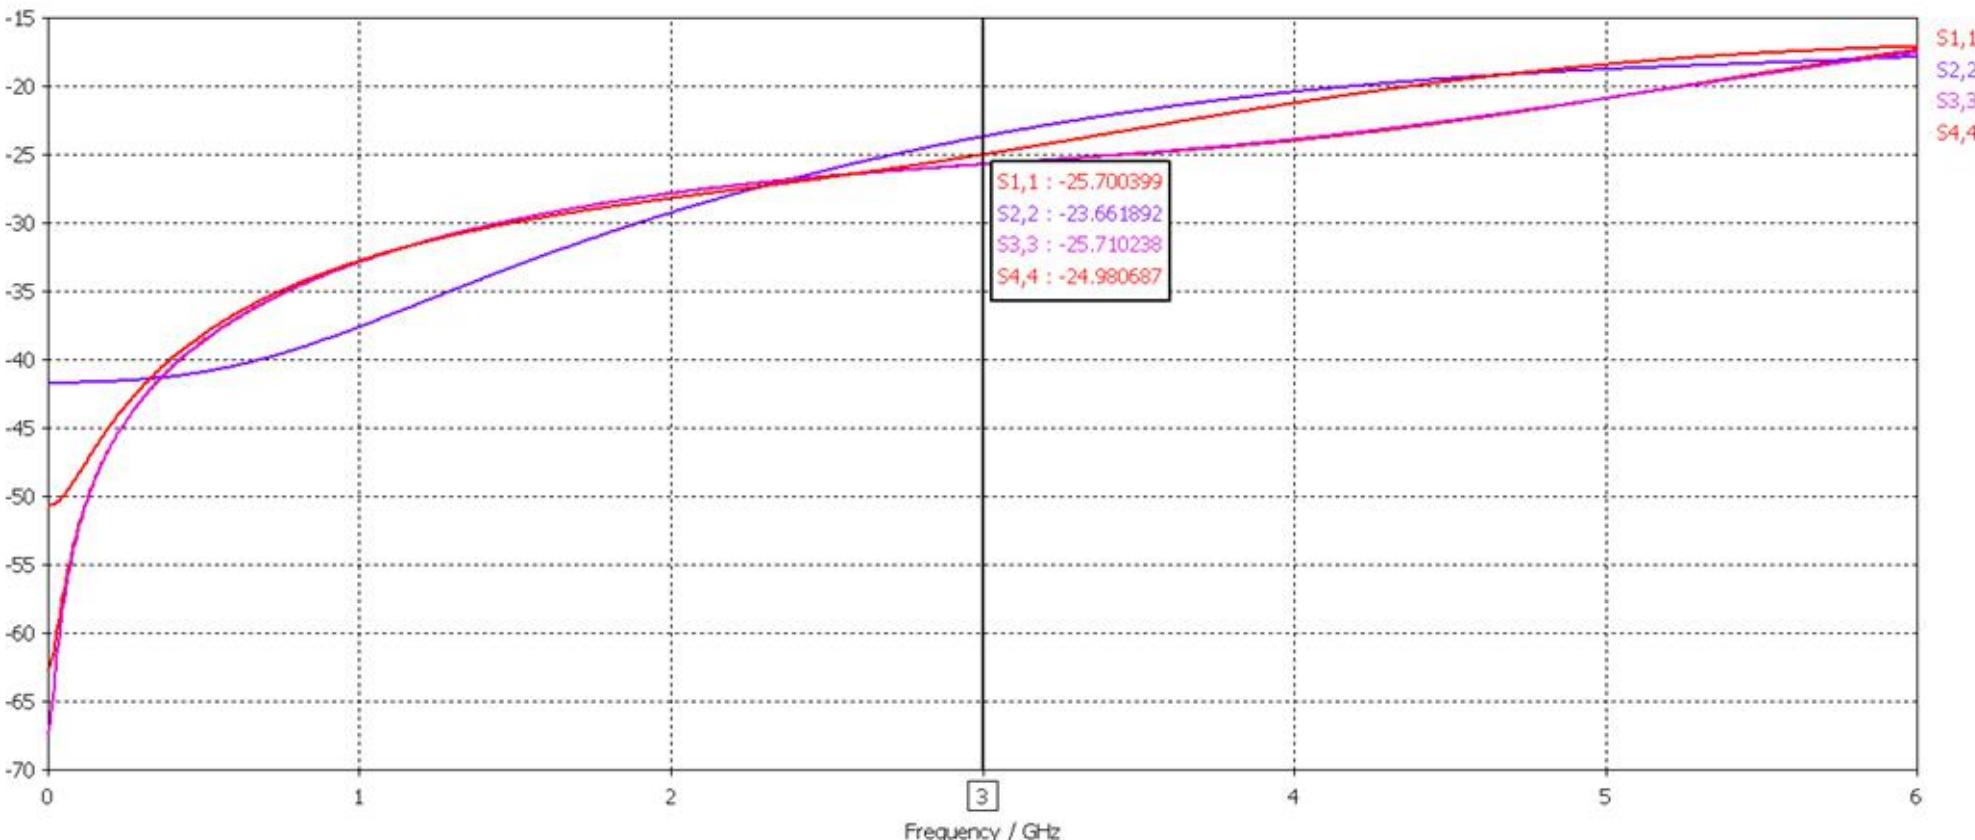

**Electrical:**

Impedance	75 Ohms
Freq Range	0-6.0 GHz
Working Voltage	250 Vrms
Dielectric withstanding voltage	750 Vrms
Reflection Factor (VSWR)	1.07 Max DC-1.5 GHz 1.14 Max 1.5GHz-3.0 GHz 1.16 Max 3.0GHz-3.2 GHz 1.31 Max 3.2GHz-6.0 GHz

Contact Resistance Centre Contact 4.0 m Ohm

Outer Contact 2.5 m Ohm

Insulation Resistance

> 1000 Meg Ohm


**Materials:**

Centre Pin	BeCu /10u" Au
Metal Parts	Brass/Au
Insulators	PTFE

**Environmental:**

Temp Range: -65 to +85°C

Mating cycles: 500

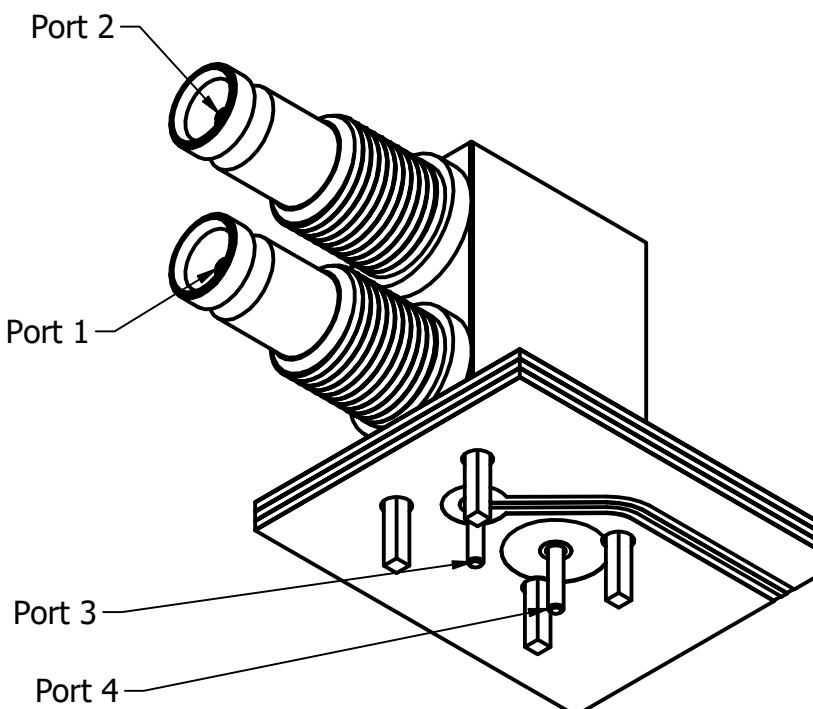

**Port designations**

Port 1 = PCB Lower Coax Connector  
Port 2 = PCB Upper Coax Connector  
Port 3 = Coax Lower  
Port 4 = Coax Upper

Design Right Protected		Material:	Finish:	Gen Tol ±0.10	DO NOT SCALE	
						Unit of Measure: millimeters (mm)
Third Angle Projection	Designed by <b>P.Fayers</b>	Checked by	Approved by	©2024	Date 10 Jan 2019	A3
		This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.	Description: 6GHz Dual Port 1.0-2.3 Socket with 4.75 mm Legs			
			Part No: <b>XGS-06-RB47-GGD Cust</b>	Issue 3.3	Sheet 3 / 3	