


General Description

The XGS-06-TB27-NNL is a top entry PCB bulkhead mounted connector which conforms to the standard of SMPTE ST 2081-1, allowing bit-rates of 5.94Gbit/s over a single coaxial connection. The 8mm pitch of the connector enables double wiring densities and is optimised for use in 6G HD-SDI applications. The connector has a 2.7mm leg length and a longer body.

This connector was formerly sold as:
C-SX-179 when supplied with ANG-C2-BBN-2.35

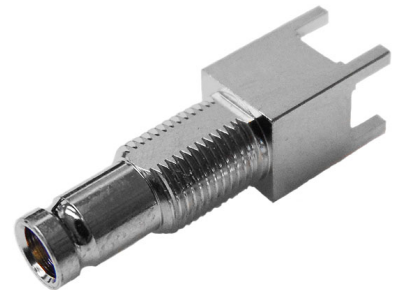

Electrical




Impedance		75Ω
Frequency Range		0-6GHz
Working Voltage		250Vrms
Reflection Factor (VSWR)		1.1 (max) 0-3GHz 1.2 (max) 3-6GHz
Dielectric Withstanding Voltage		750Vrms
Insulation Resistance		≥1000MΩ
Contact Resistance	Centre Contact	≤ 4.0mΩ
	Outer Contact	≤ 2.5mΩ

Materials


Centre Pin	BeCu / 10 μ"Au
Metal Parts	Brass/Ni
Insulators	PTFE

Environmental

Connector Type	DIN 1.0/2.3 Female
Temp Range	-65 to +85°C
Mating Cycles	500

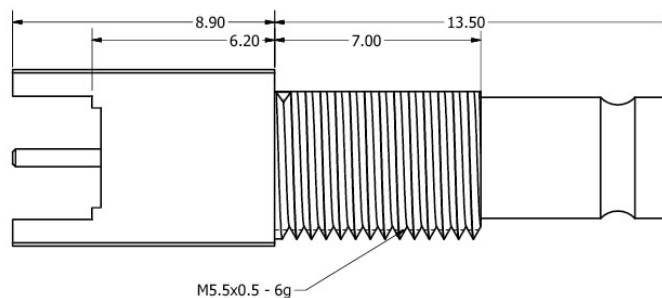

Return Loss Graph

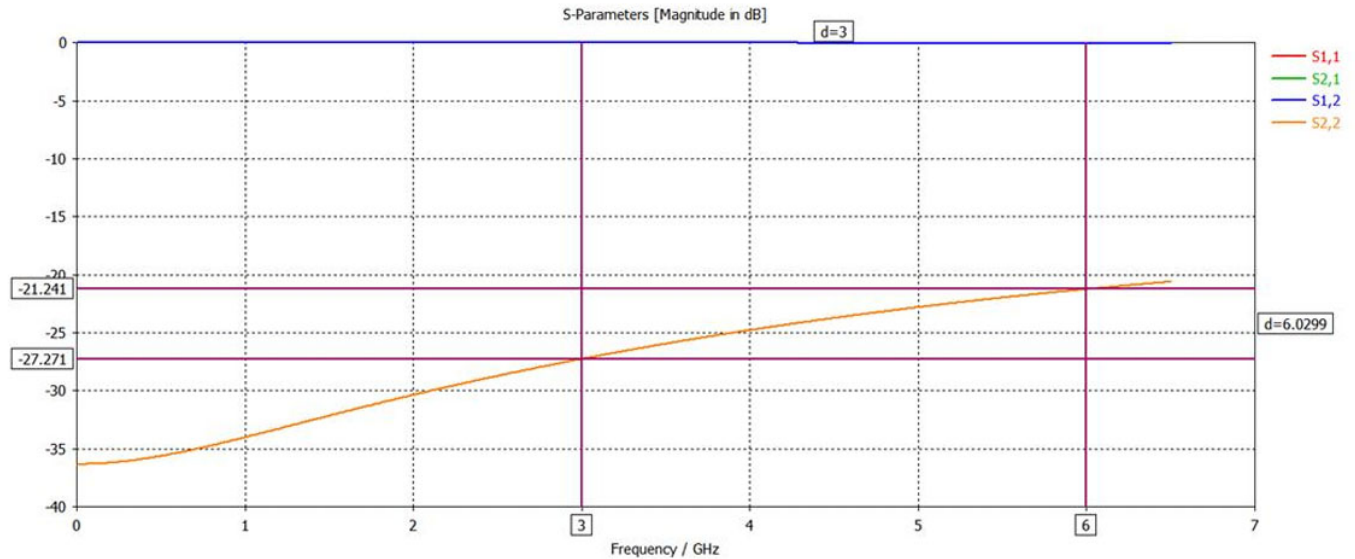

PCB Layout

