


## General Description

Our range of 12GHz Precision Micro BNC coaxial connectors are optimised for 4K/Quad HD and Ultra HD Broadcast applications whilst meeting the JIA CXP-12 CoaXPress specification. These high performance connectors allow you to achieve a 12GHz channel in one single connection. The Micro BNC connectors are mateable with any standard Micro BNC connector. The XPS-12-RB24-GNDO is a dual port Micro BNC connector with a through hole pins, which features enlarged flanges at their mating parts and the connector body is finished with gold plate.

This connector was formerly sold as:  
C-SX-207 when supplied with ANP-C2-DBN-1.50

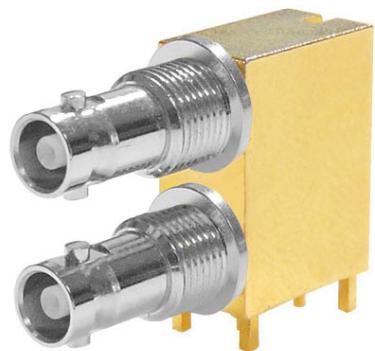

## Electrical



Impedance	75Ω
Frequency Range	0-12GHz
Working Voltage	250Vrms
Reflection Factor (VSWR)	1.52 (max) 0-12GHz
Dielectric Withstanding Voltage	750Vrms
Insulation Resistance	≥1000MΩ
Contact Resistance	Centre Contact ≤ 4.0mΩ
	Outer Contact ≤ 2.5mΩ

## Materials

Centre Pin	BeCu / 10 μ" Au
Metal Parts	Brass/Au/Ni
Insulators	PTFE


## Environmental

Connector Type	Micro BNC Female
Temp Range	-65 to +85°C
Mating Cycles	500

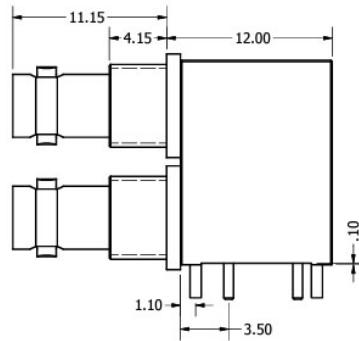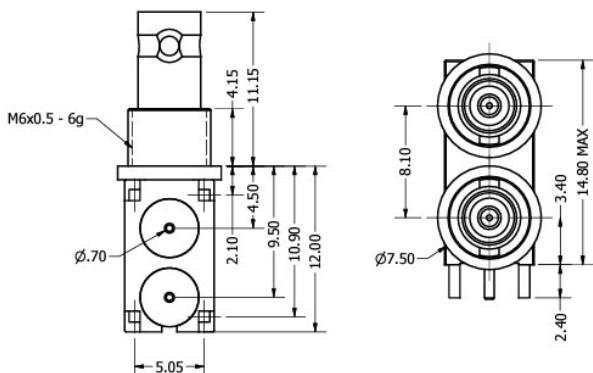


## Return Loss Graph

RL Graph Connector Only

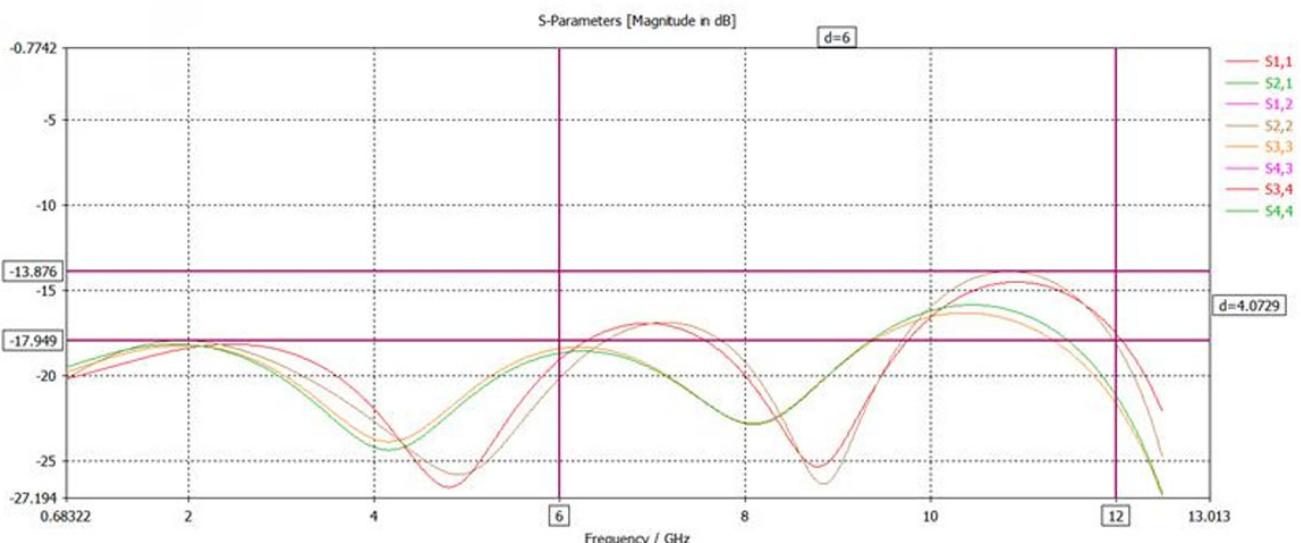

## PCB Layout

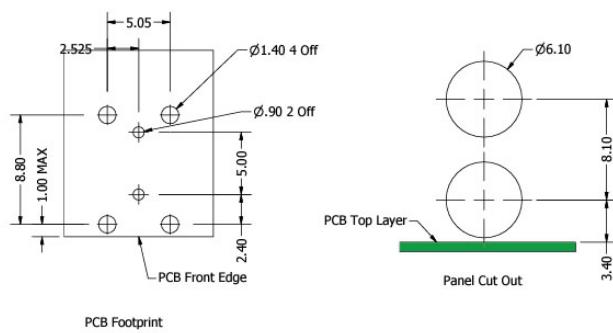
 PCB Layout  
 Used to produce data
