


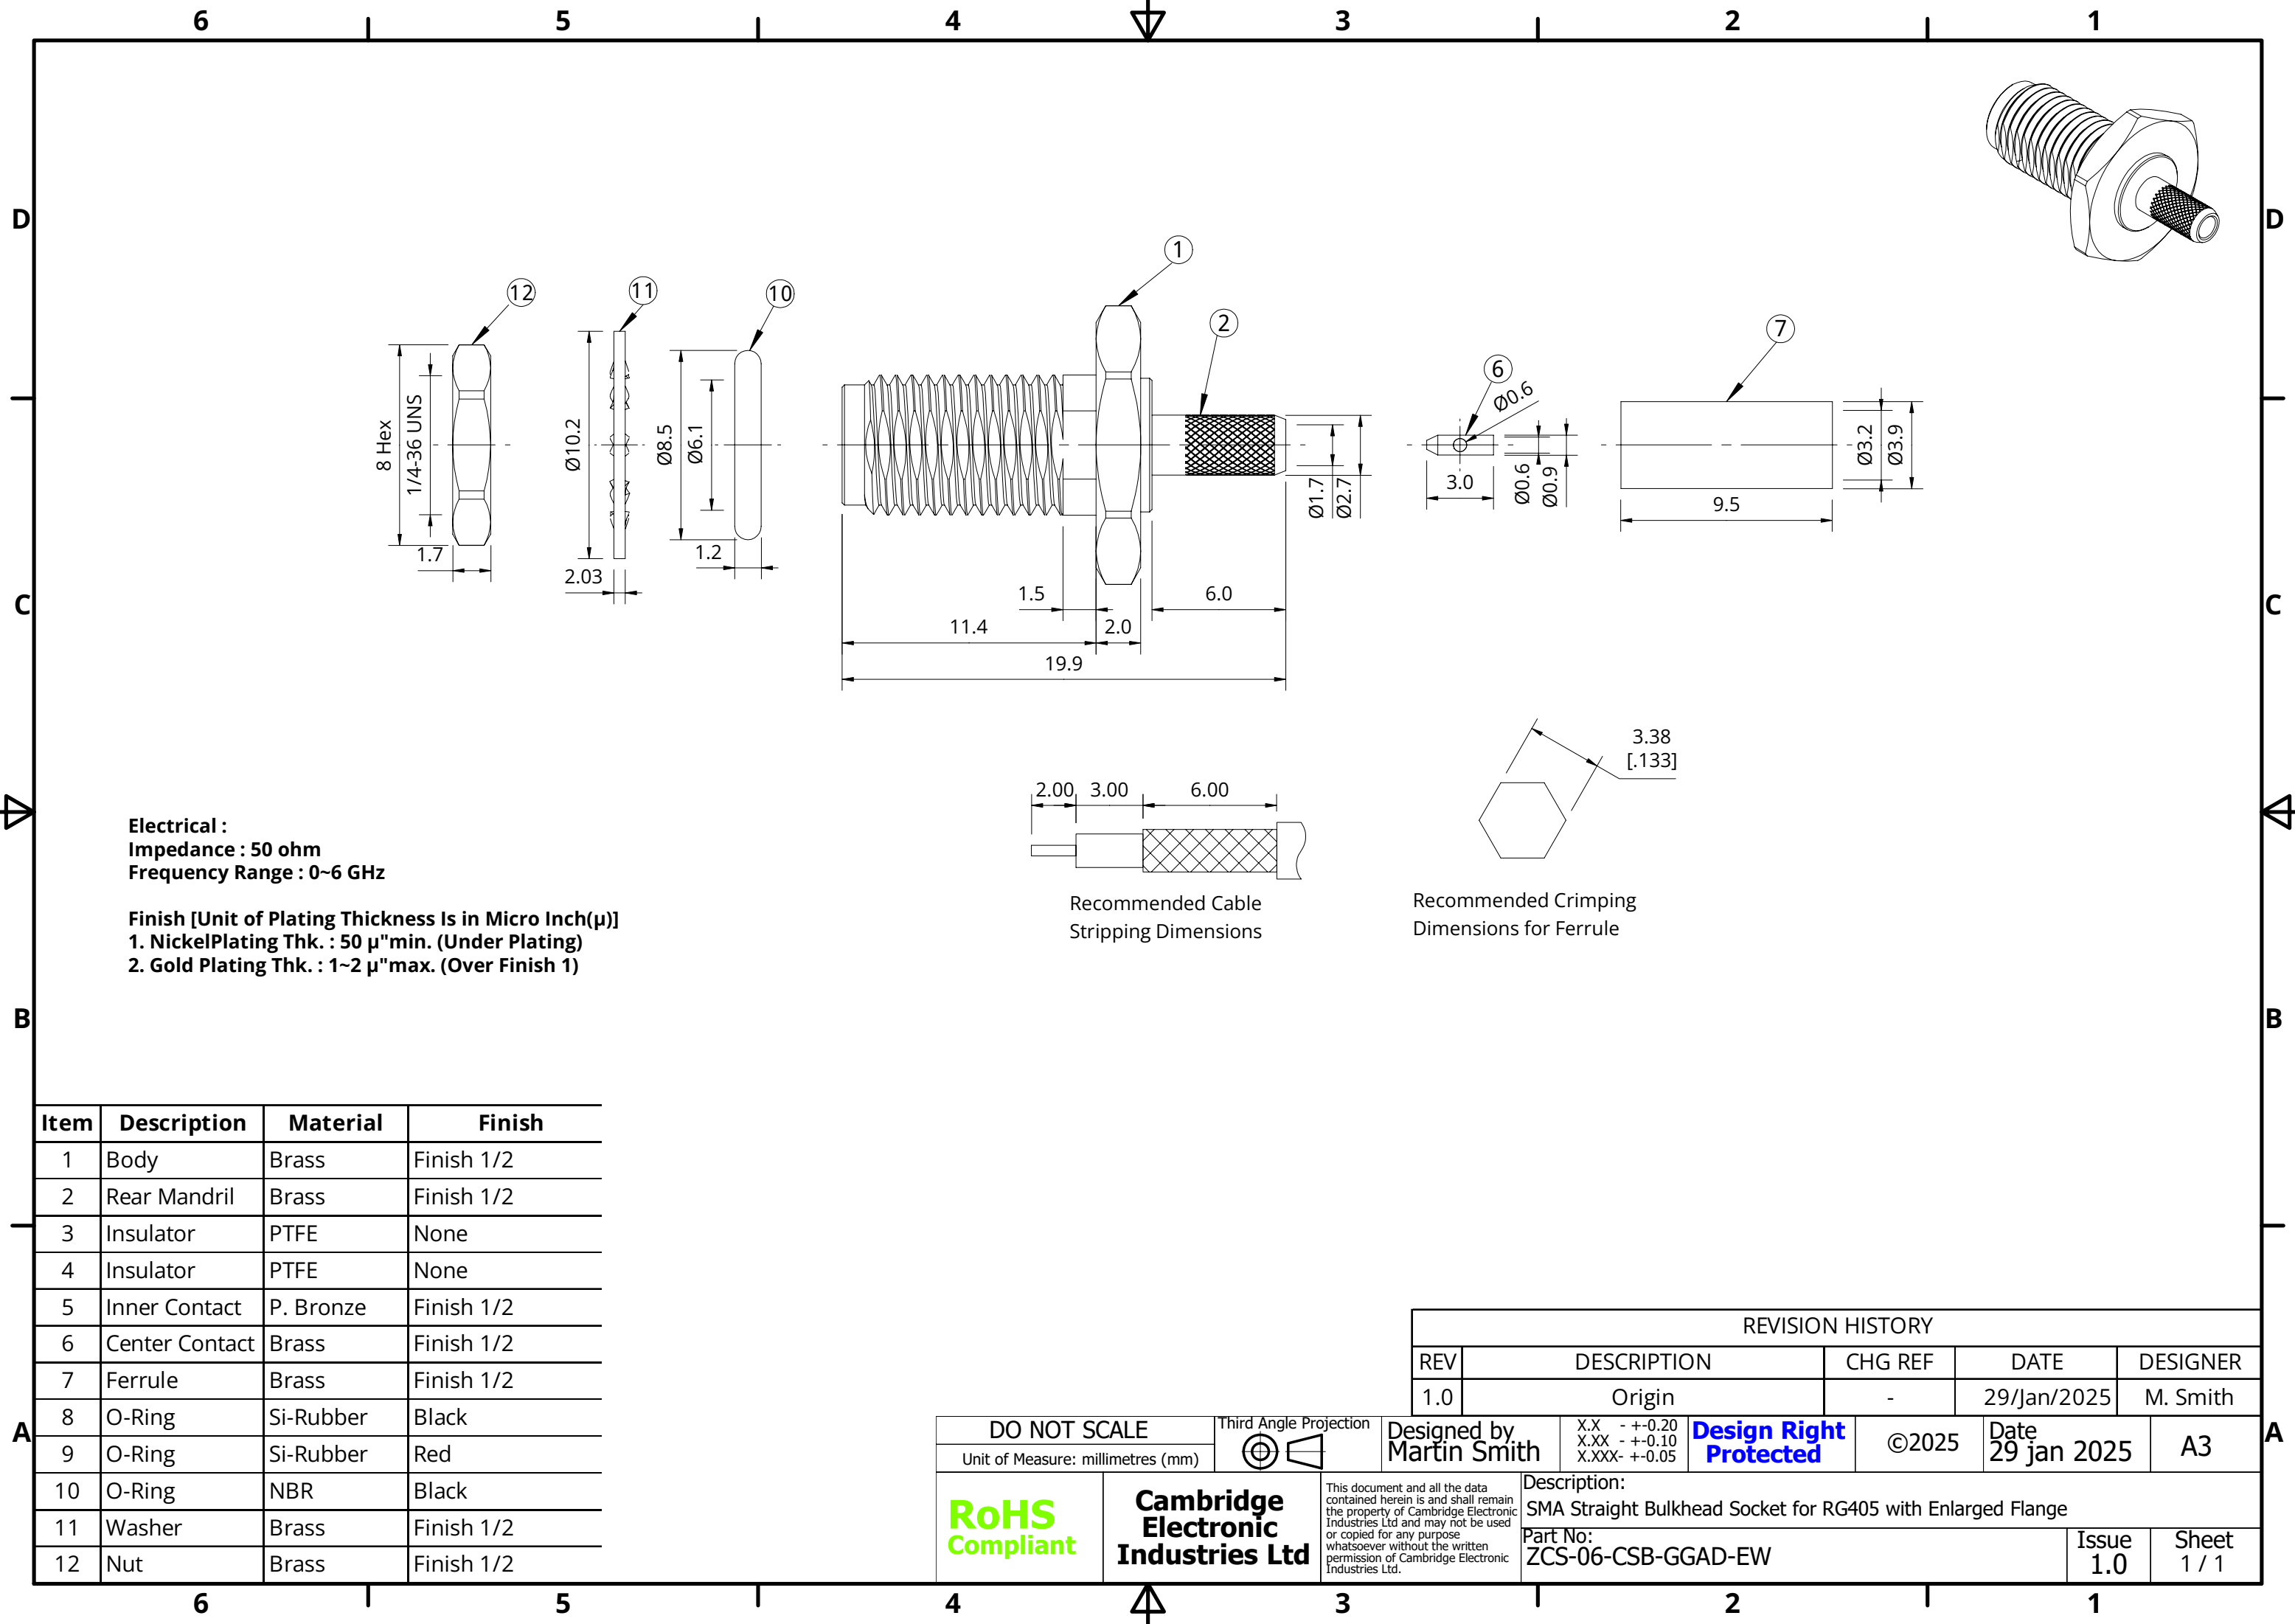

Electrical :
Impedance : 50 ohm
Frequency Range : 0~6 GHz

Finish [Unit of Plating Thickness Is in Micro Inch(μ)]
1. NickelPlating Thk. : 50 μ"min. (Under Plating)
2. Gold Plating Thk. : 1~2 μ"max. (Over Finish 1)

Item	Description	Material	Finish
1	Body	Brass	Finish 1/2
2	Rear Mandril	Brass	Finish 1/2
3	Insulator	PTFE	None
4	Insulator	PTFE	None
5	Inner Contact	P. Bronze	Finish 1/2
6	Center Contact	Brass	Finish 1/2
7	Ferrule	Brass	Finish 1/2
8	O-Ring	Si-Rubber	Black
9	O-Ring	Si-Rubber	Red
10	O-Ring	NBR	Black
11	Washer	Brass	Finish 1/2
12	Nut	Brass	Finish 1/2

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	29/Jan/2025	M. Smith

DO NOT SCALE		Third Angle Projection 	Designed by Martin Smith	X.X - +0.20	Design Right Protected	©2025	Date 29 jan 2025	A3					
Unit of Measure: millimetres (mm)				X.XX - +0.10					X.XXX- +0.05				
RoHS Compliant	Cambridge Electronic Industries Ltd	This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.		Description: SMA Straight Bulkhead Socket for RG405 with Enlarged Flange									
				Part No: ZCS-06-CSB-GGAD-EW						Issue 1.0	Sheet 1 / 1		