


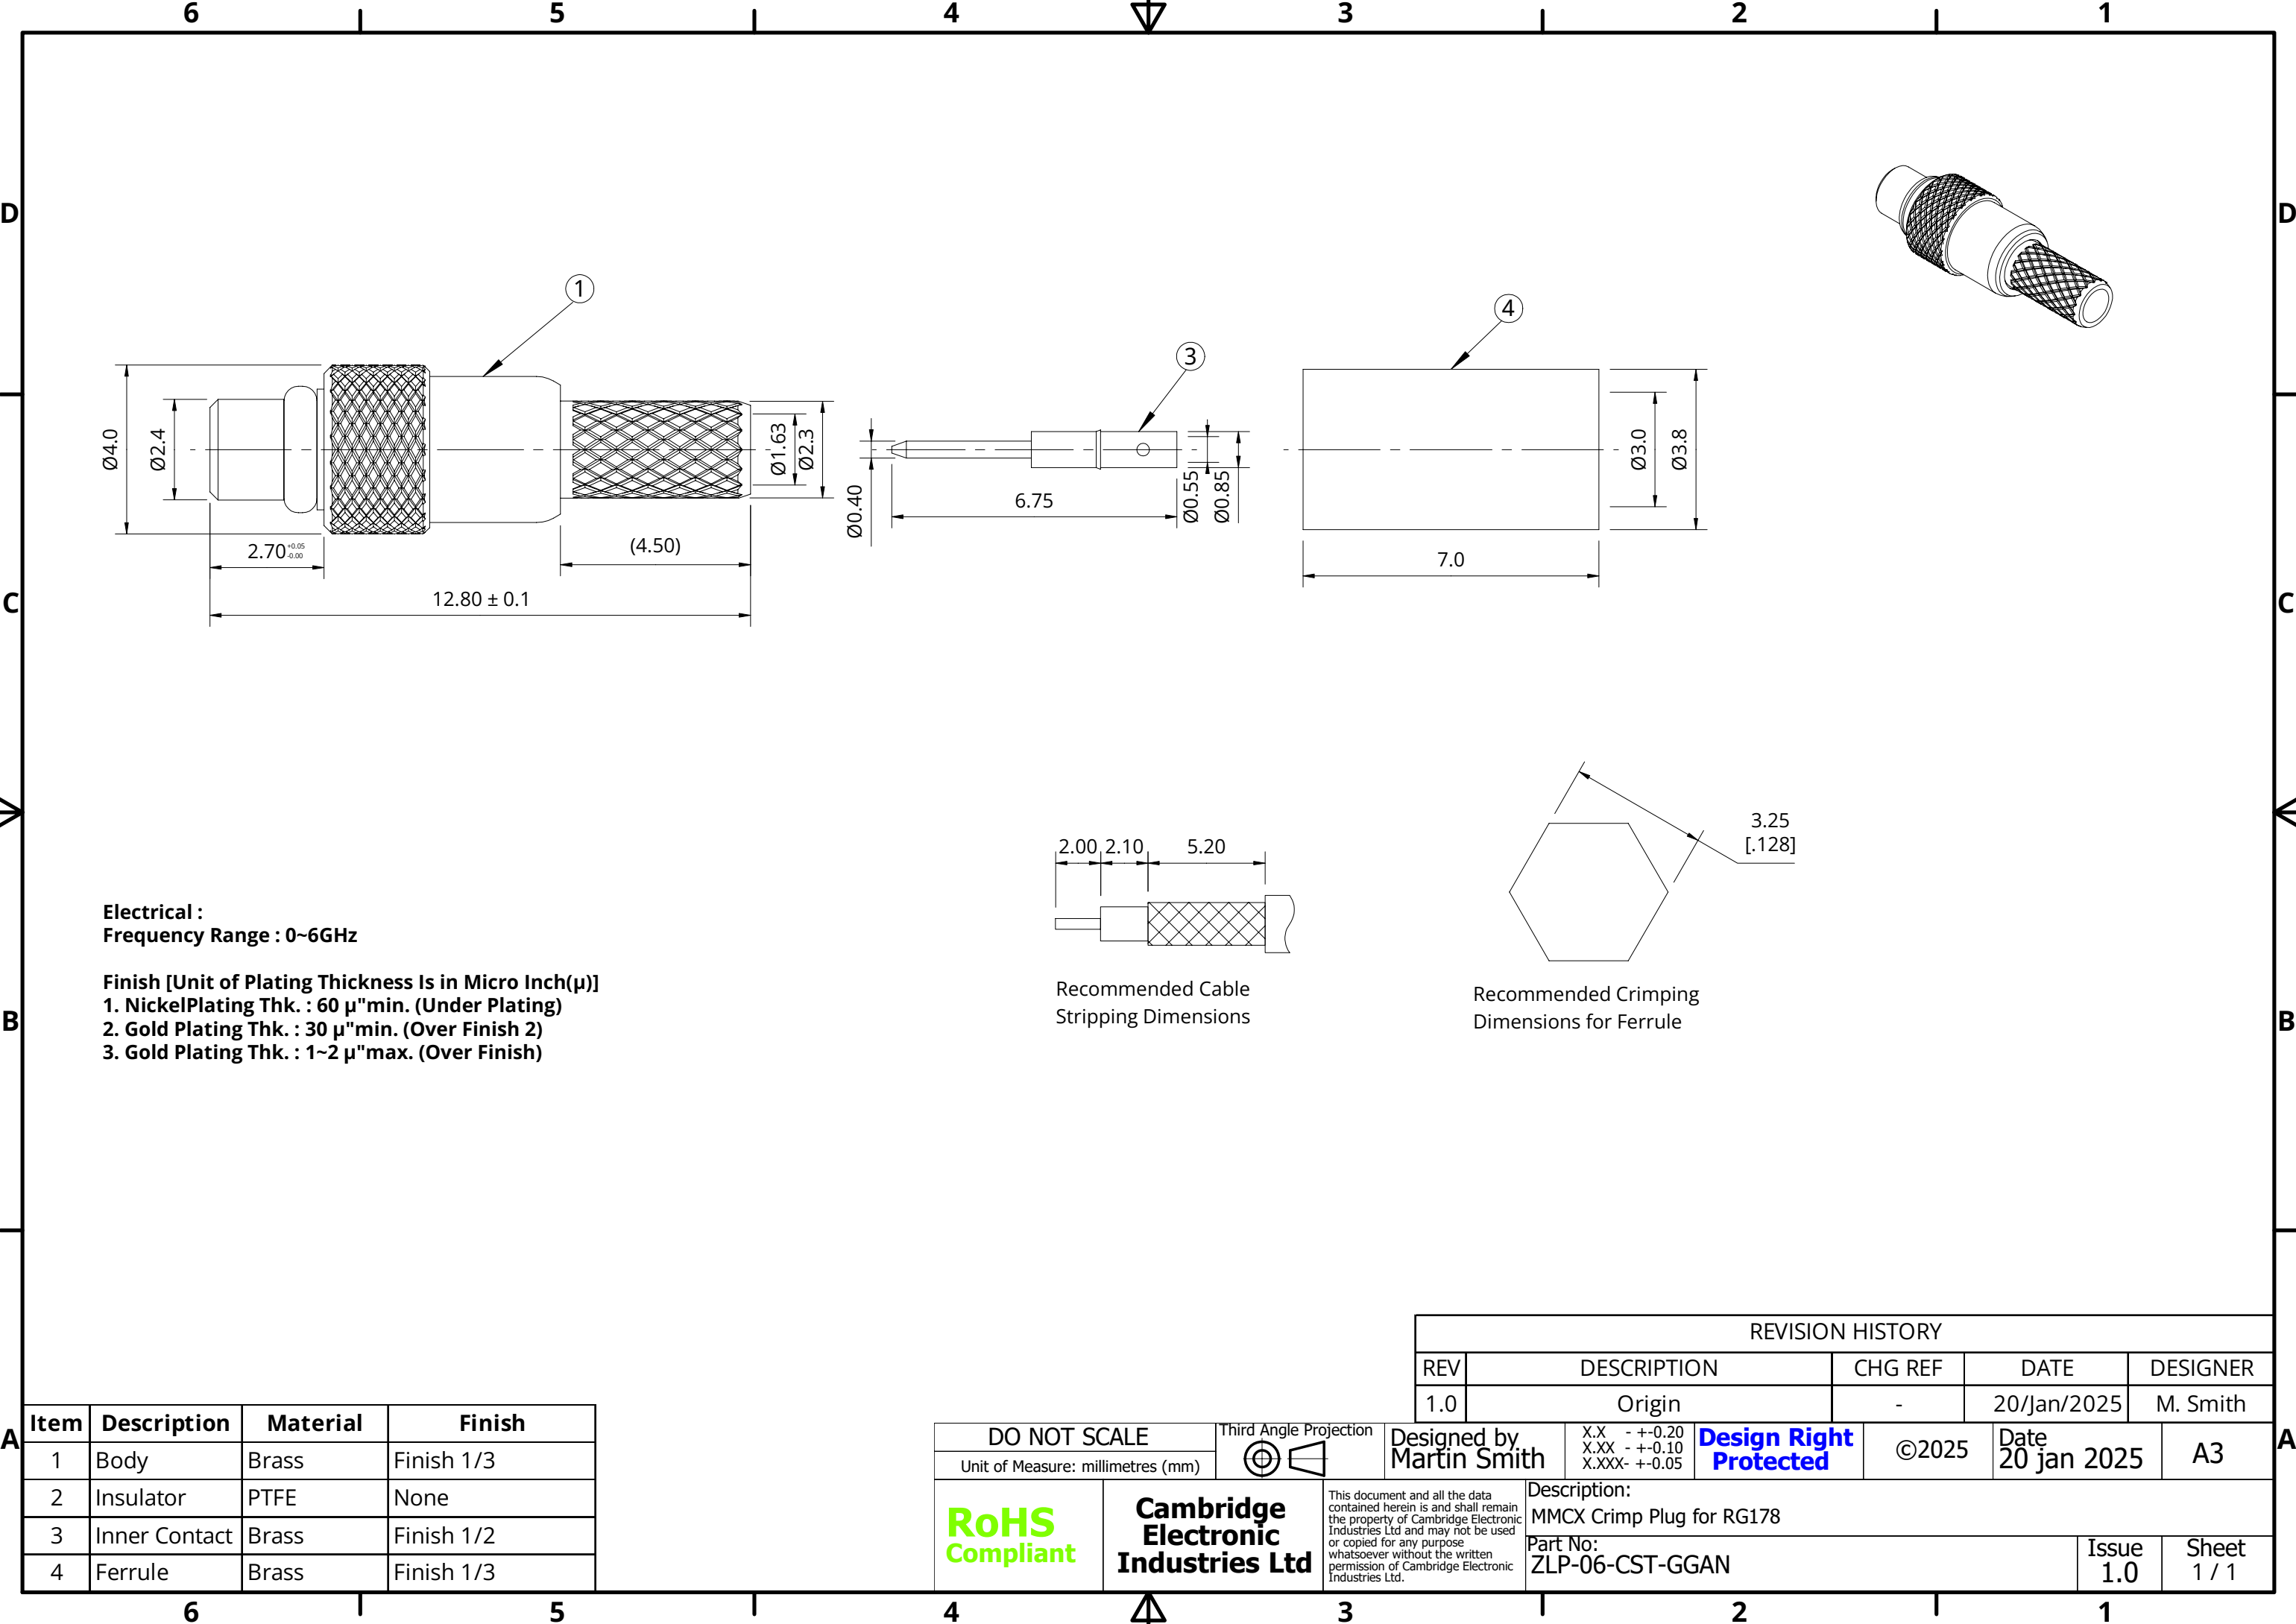

Electrical :  
Frequency Range : 0~6GHz

Finish [Unit of Plating Thickness Is in Micro Inch(μ)]  
1. NickelPlating Thk. : 60 μ"min. (Under Plating)  
2. Gold Plating Thk. : 30 μ"min. (Over Finish 2)  
3. Gold Plating Thk. : 1~2 μ"max. (Over Finish)

| Item | Description   | Material | Finish     |
|------|---------------|----------|------------|
| 1    | Body          | Brass    | Finish 1/3 |
| 2    | Insulator     | PTFE     | None       |
| 3    | Inner Contact | Brass    | Finish 1/2 |
| 4    | Ferrule       | Brass    | Finish 1/3 |

DO NOT SCALE  
Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by  
Martin Smith

X.X - +0.20  
X.XX - +0.10  
X.XXX - +0.05

Design Right  
Protected

©2025

Date  
20 jan 2025

A3

RoHS  
Compliant

Cambridge  
Electronic  
Industries Ltd

This document and all the data  
contained herein is and shall remain  
the property of Cambridge Electronic  
Industries Ltd and may not be used  
or copied for any purpose  
whatsoever without the written  
permission of Cambridge Electronic  
Industries Ltd.

Description:  
MMCX Crimp Plug for RG178  
Part No:  
ZLP-06-CST-GGAN

Issue  
1.0

Sheet  
1 / 1

| REVISION HISTORY |             |         |             |          |
|------------------|-------------|---------|-------------|----------|
| REV              | DESCRIPTION | CHG REF | DATE        | DESIGNER |
| 1.0              | Origin      | -       | 20/Jan/2025 | M. Smith |