


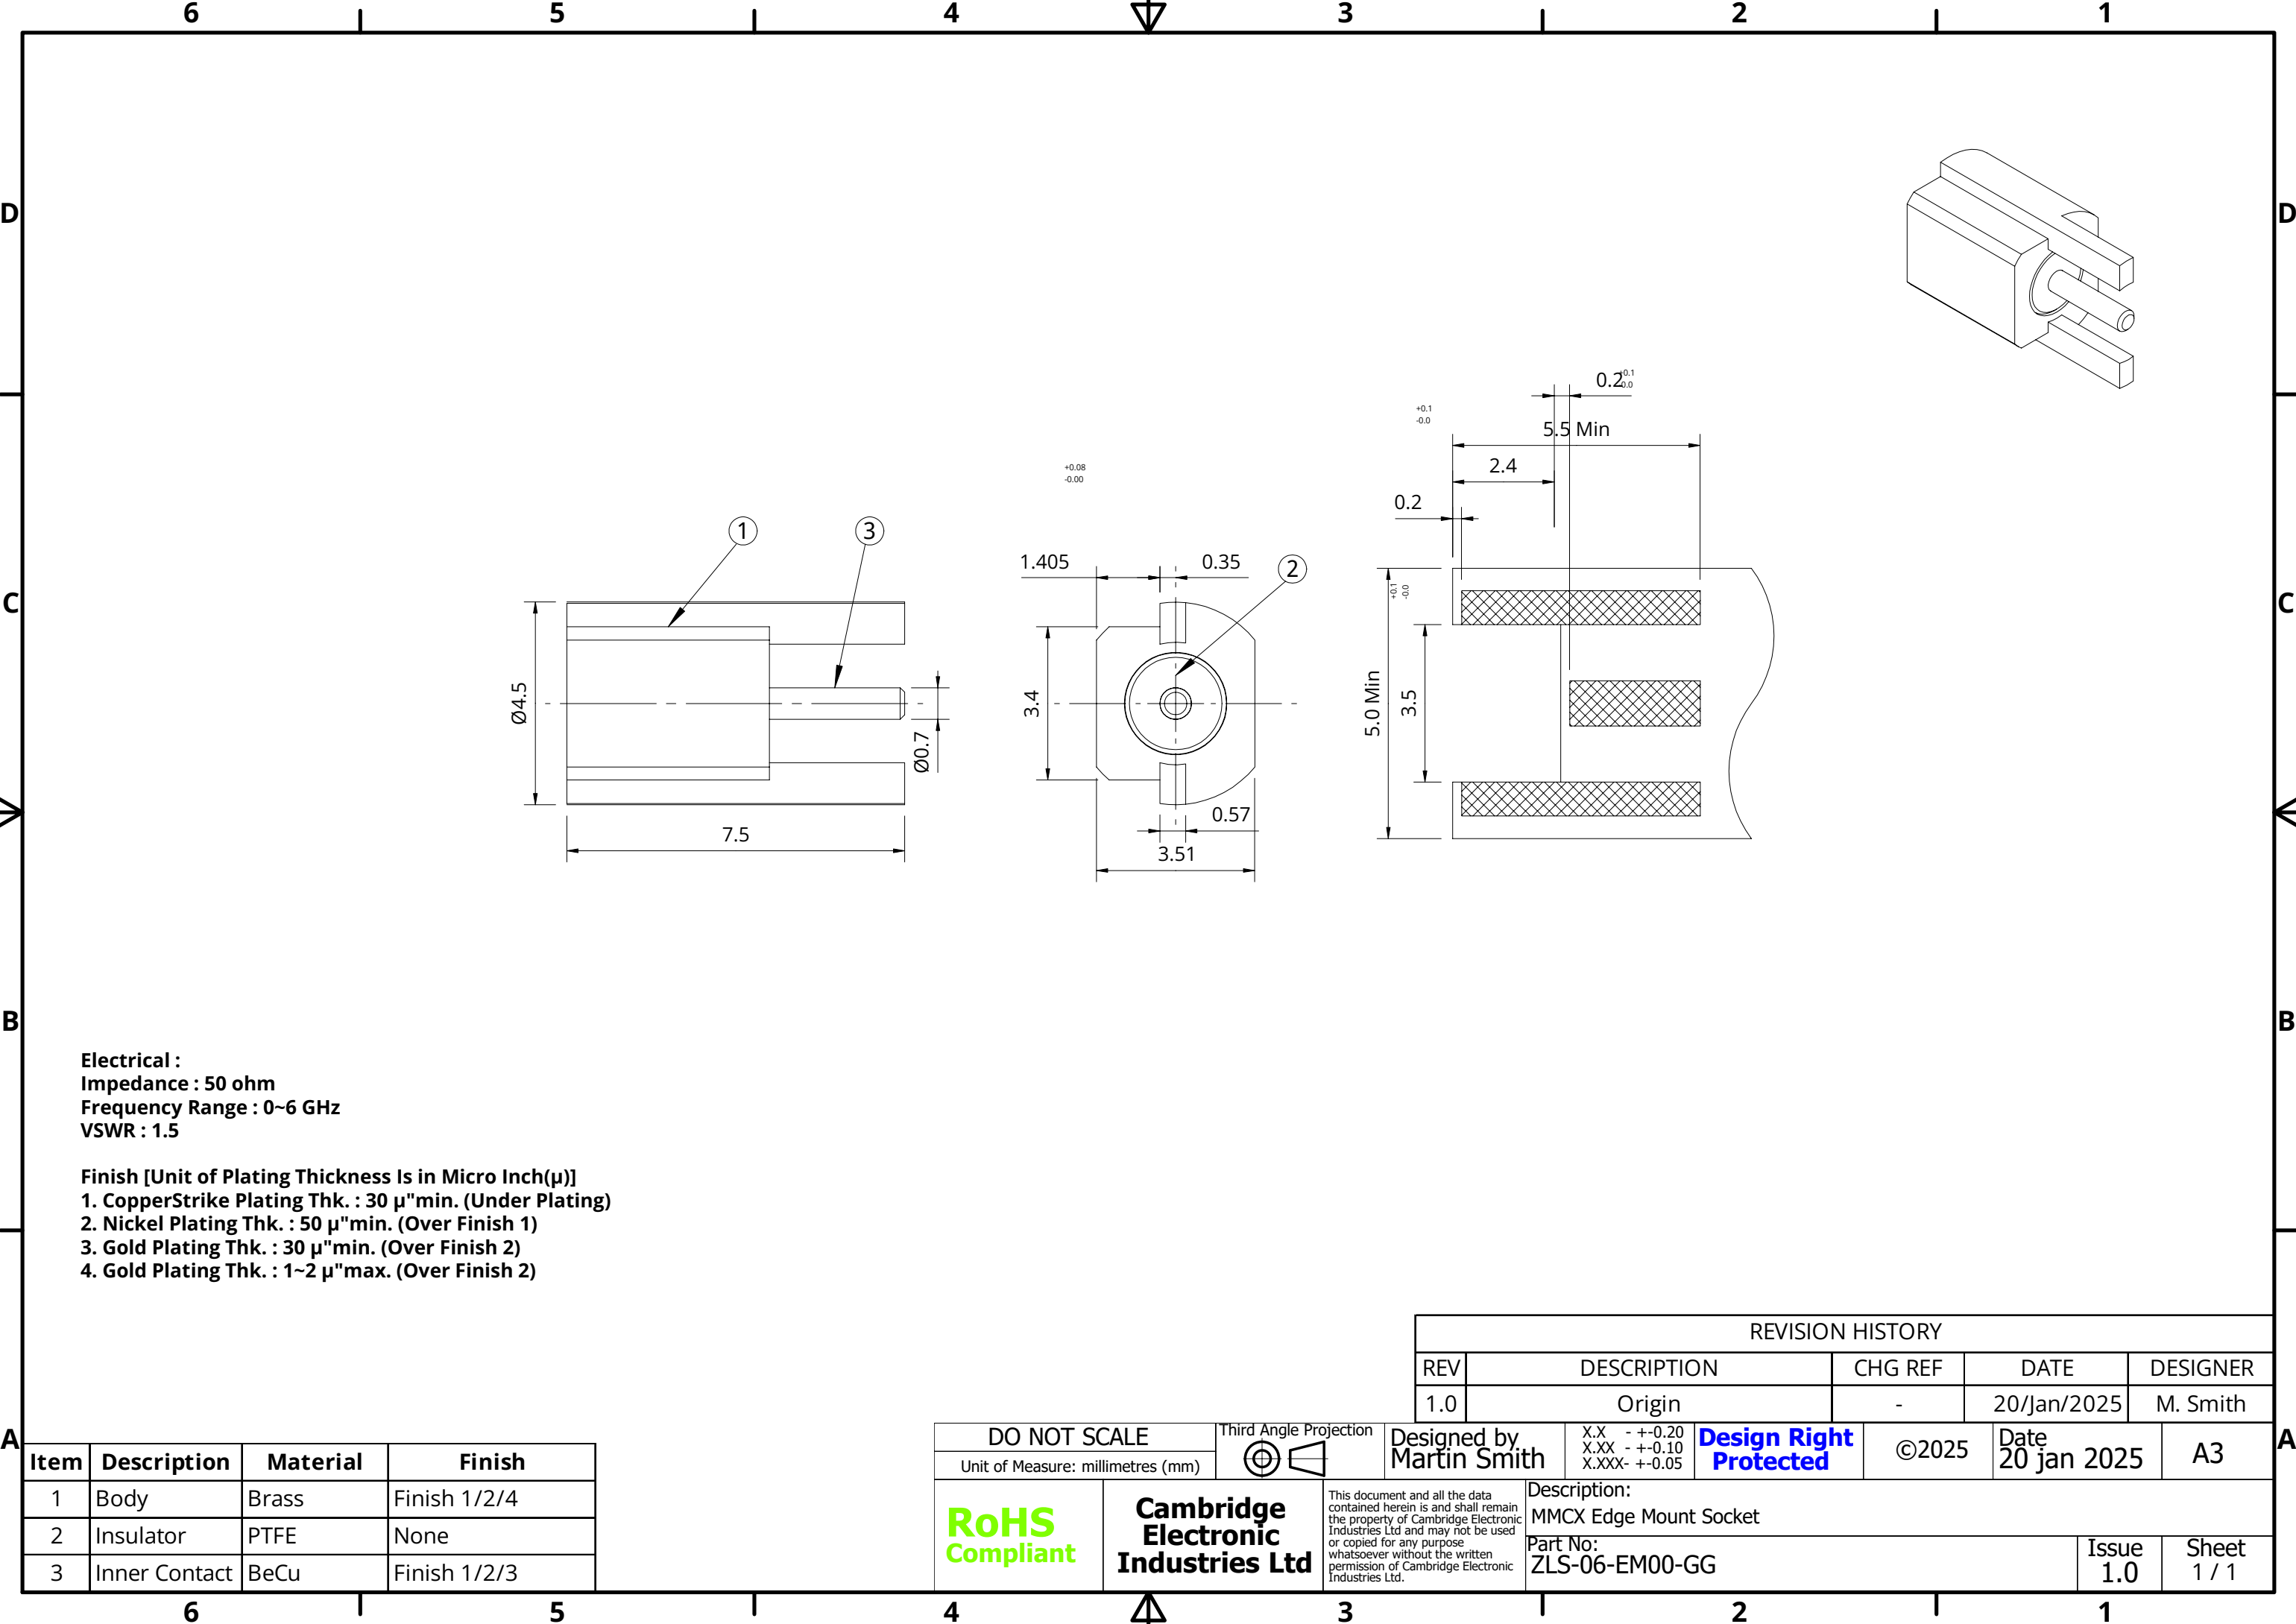


Electrical :
Impedance : 50 ohm
Frequency Range : 0~6 GHz
VSWR : 1.5

Finish [Unit of Plating Thickness Is in Micro Inch(μ)]
1. CopperStrike Plating Thk. : 30 μ"min. (Under Plating)
2. Nickel Plating Thk. : 50 μ"min. (Over Finish 1)
3. Gold Plating Thk. : 30 μ"min. (Over Finish 2)
4. Gold Plating Thk. : 1~2 μ"max. (Over Finish 2)

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	20/Jan/2025	M. Smith

Item	Description	Material	Finish
1	Body	Brass	Finish 1/2/4
2	Insulator	PTFE	None
3	Inner Contact	BeCu	Finish 1/2/3

DO NOT SCALE		Third Angle Projection 	Designed by Martin Smith	X.X - +0.20	Design Right Protected	©2025	Date 20 jan 2025	A3				
Unit of Measure: millimetres (mm)				X.XX - +0.10					X.XXX- +0.05			
RoHS Compliant	Cambridge Electronic Industries Ltd	This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.		Description: MMCX Edge Mount Socket								
				Part No: ZLS-06-EM00-GG					Issue 1.0	Sheet 1 / 1		