



Specifications:  
Current Rating: 4.0A  
Voltage Rating: 250V AC  
Contact Resistance: 30m Ohm Max  
Insulation Resistance: 100M Ohm Min  
Withstanding Voltage: 750V AC for one minute  
Temperature Range: -45°C ~ +125°C

CC08-03S-A-PB15-TR  
Tape & Reel  
Gold Plated 15u"  
PCB Dip  
A-Coding  
Socket  
No. of Positions  
M8

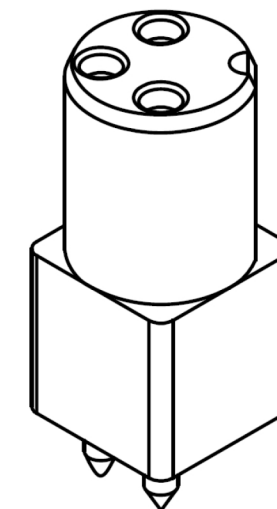

Materials and Finish:  
Insulator: High Temp. Plastic (Ny6T UL94V-0)  
Insulator Colour: Black  
Contact: Phosphor Bronze  
Contact Plating: Gold Plated 15u" In Mating Area

Note:  
No sink marks on exterior faces  
Flashes 0.15mm max  
Draft no stated: 1°  
Radii not stated: 0.15mm  
Parts must be cleaned and free of grease, oil, dirt and damages.

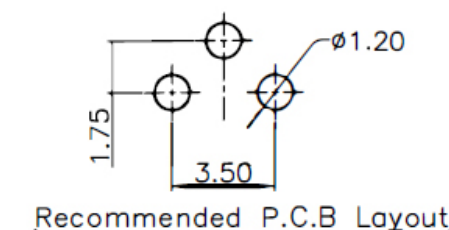

| REVISION HISTORY |             |         |            |           |
|------------------|-------------|---------|------------|-----------|
| REV              | DESCRIPTION | CHG REF | DATE       | DESIGNER  |
| 1.0              | Origin      | -       | 21 08 2023 | Owen Page |

DO NOT SCALE  
Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by  
Owen Page

X.X - ±0.30  
X.XX - ±0.20  
X.XXX - ±0.15

Design Right  
Protected

©2023

Date  
21 08 2023

A3

RoHS  
Compliant

Cambridge  
Electronic  
Industries Ltd

This document and all the data  
contained herein is and shall remain  
the property of Cambridge Electronic  
Industries Ltd and may not be used  
or copied for any purpose  
whatsoever without the written  
permission of Cambridge Electronic  
Industries Ltd.

Description:  
M8 Receptacle 3 Pos Straight PCB Mount

Part No:  
CC08-03S-A-PB15-TR

Issue  
1.0

Sheet  
1 / 1