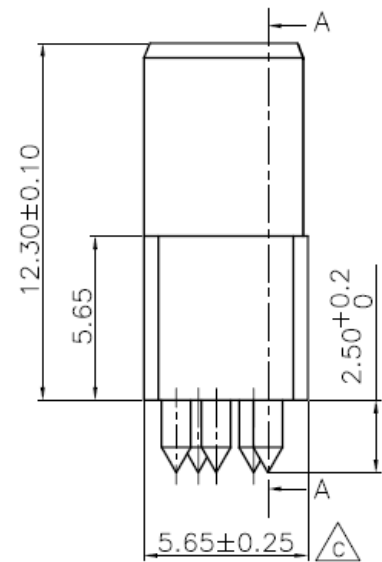
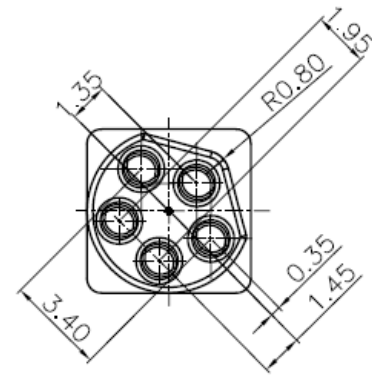


Print White Identification
Marker for Soldering


Detail "Z"
Scale 2:1

Materials and Finish:
Insulator: Ny66 UL94V-0
Insulator Color: Black
Contact: Phosphor Bronze
Contact Plating: Gold Plated 15u" In Mating Area

Note:
No sink marks on exterior faces
Flashes 0.15mm max
Draft no stated: 1'
Radii not stated: 0.15mm
Parts must be cleaned and free of grease, oil, dirt and damages

Specifications:
Current Rating: 4.0A
Voltage Rating: 250V AC
Contact Resistance: 30m Ohm Max
Insulation Resistance: 100M Ohm Min Withstanding
Voltage: 750V AC for one Minute
Temperature Range: -40°C ~ +85°C

CC08-05S-B-PB15-TR
Tape & Reel
Gold Plated 15u"
PCB Dip
B-Coding
Socket
No. of Positions
M8

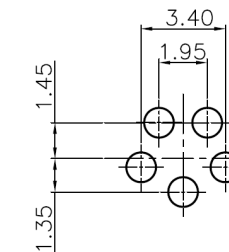

Recommended P.C.B Layout

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	21 08 2023	Owen Page

DO NOT SCALE	Third Angle Projection	Designed by Owen Page	X.X - +0.20 X.XX - +0.15	Design Right Protected	©2023	Date 21 08 2023	A4
--------------	------------------------	--------------------------	-----------------------------	-----------------------------------	-------	--------------------	----

Unit of Measure: millimetres (mm)



Designed by
Owen Page

X.X - +0.20
X.XX - +0.15

**Design Right
Protected**

©2023

Date
21 08 2023

A4

**RoHS
Compliant**

**Cambridge
Electronic
Industries Ltd**

This document and all the data
contained herein is and shall remain
the property of Cambridge Electronic
Industries Ltd and may not be used
or copied for any purpose
whatsoever without the written
permission of Cambridge Electronic
Industries Ltd.

Description:
M8 Receptacle 5 Pos Straight PCB Mount

Part No:
CC08-05S-B-PB15-TR

Issue
1.0

Sheet
1 / 1