
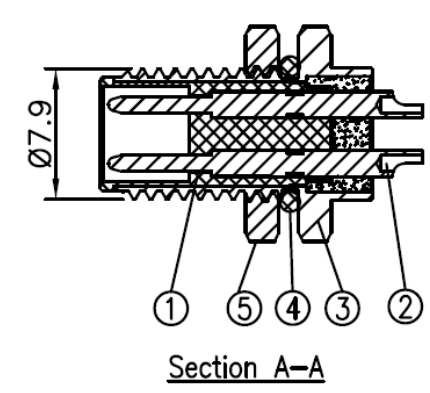
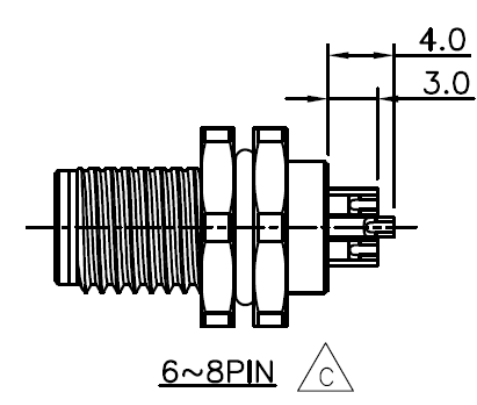
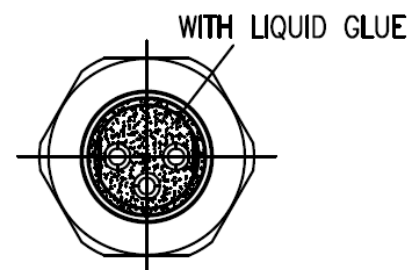


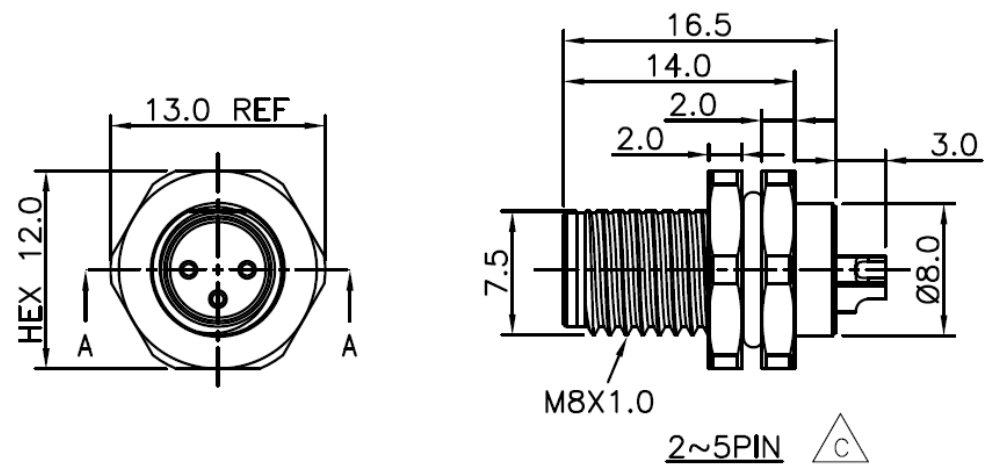


Specifications:
Current Rating:3A(2~5P);1.5A(6~8P) AC/DC
Voltage Rating:60V(2~3P);30V(4~8P) AC/DC
Contact Resistance: 5m ohm. Max.
Insulation Resistance:100M ohm. Min.
Withstanding Voltage: 500V AC/Minute(2~5P)
250V AC/Minute(6~8P)
Waterproof Rate: IP67
Operating Temperature Range: -40°C ~ +100°C

CC08-XXP-FX-PM
Panel Mount Solder
Coding: A or B
Front Fastened
Plug
No. of Contacts
M8

Pin Assignments Front View

B Coding					
A Coding					



Item	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated 3u"	2~8
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Seal ring	Silicone	Red	1
5	Nut	Copper Alloy	Nickel Plated 60u"	1

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	21 08 2023	Owen Page

DO NOT SCALE
Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by
Owen Page

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.

Description:
M8 Plug Front Fastened Solder Type
Part No:
CC08-XXP-FX-PM

©2023

Date
21 08 2023

Issue
1.0

Sheet
1 / 1

Design Right
Protected