
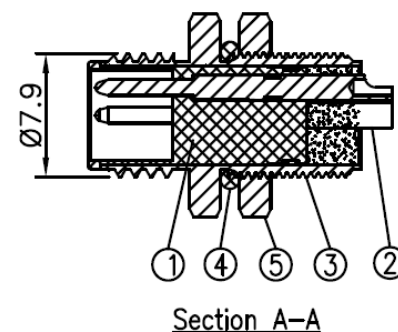
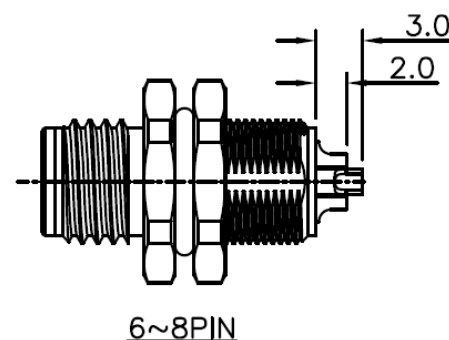
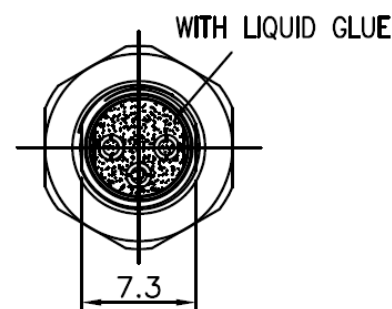
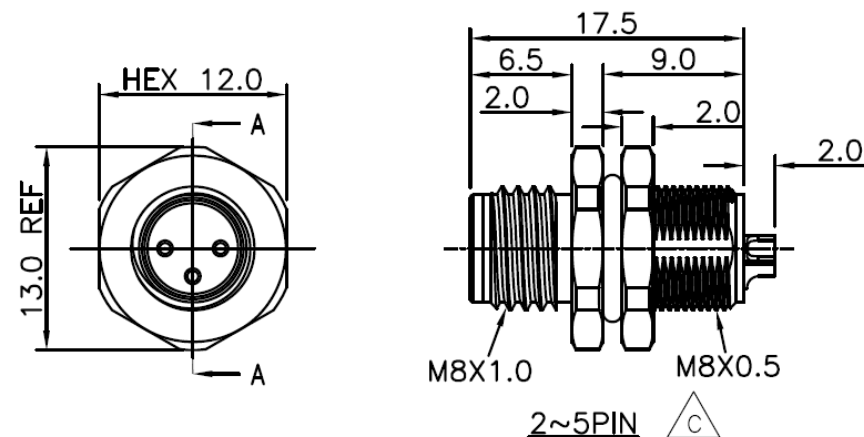








Specifications:
Current Rating: 3A(2~5P); 1.5A(6~8P) AC/DC
Voltage Rating: 60V(2~3P); 30V(4~8P) AC/DC
Contact Resistance: 5m ohm. Max.
Insulation Resistance: 100M ohm. Min.
Withstanding Voltage: 500V AC/Minute (2~5P)
250V AC/Minute (6~8P)
Waterproof Rating: IP67
Operating Temperature Range: -40°C ~ +85°C

CC08-XXP-RX-PM
Panel Mount Solder
Coding: A or B
Rear Fastened
Plug
No. of Contacts
M8

Pin Assignments Front View

B Coding					
A Coding					
	<u>5P</u>	<u>3P</u>	<u>4P</u>	<u>6P</u>	<u>8P</u>

Item	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated 3u"	2~8
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Seal ring	Silicone	Red	1
5	Nut	Copper Alloy	Nickel Plated 60u"	1



Recommended
Panel CUT-OUT
Thickness: Max 3.5MM

DO NOT SCALE
Unit of Measure: millimetres (mm)

Third Angle Projection

RoHS Compliant

Cambridge Electronic Industries Ltd

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	21 08 2023	Owen Page
©2023				
Date 21 08 2023				
A4				
Issue 1.0				
Sheet 1 / 1				