
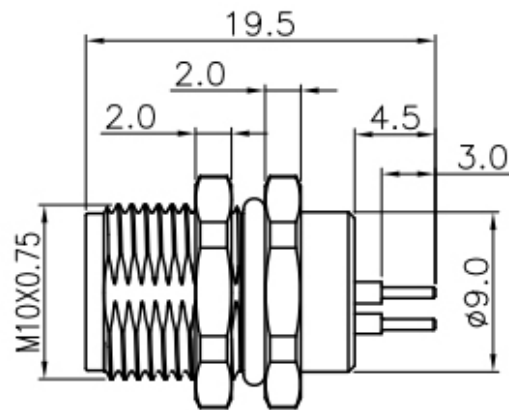
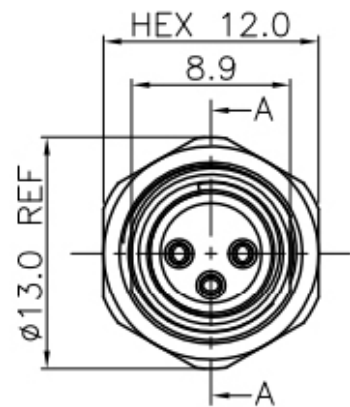


Specifications:
Current Rating: 3A (2~5P); 1A (6~8P) AC/DC
Voltage Rating: 60V (2~3P); 30V (4~8P) AC/DC
Contact Resistance: 5m ohm Max.
Insulation Resistance: 100M ohm Min.
Withstanding Voltage: 500V AC/Minute (2~5P)
250V AC/Minute (6~8P)
Operating Temperature Range: -40°C ~ +100°C
Waterproof Rate: IP67


CC08-XXS-FX-PB4
Panel Lock Thread 4:M10
Panel Mount PCB Dip
Coding: A or B
Front Fastened
Socket
No. of Contacts
M8

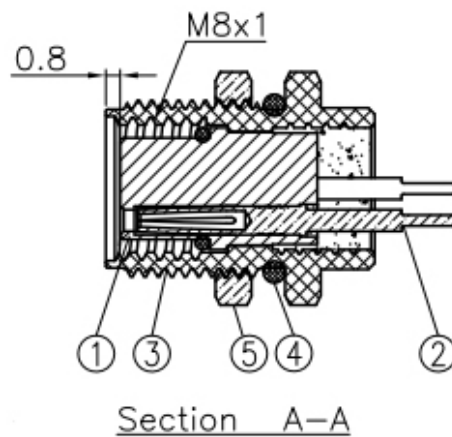


Pin Assignments Front View

B Coding			
	5P		
A Coding			
	2P	3P	4P
	6P	8P	

No.	Description	Material	Plating & Colour	Quantity
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plating 30u"	2~8
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Seal Ring	Silicone	Red	2
5	Nut	Copper Alloy	Nickel Plated 60u"	1



Recommended
Panel Cut-Out
Thickness:Max 3.5MM

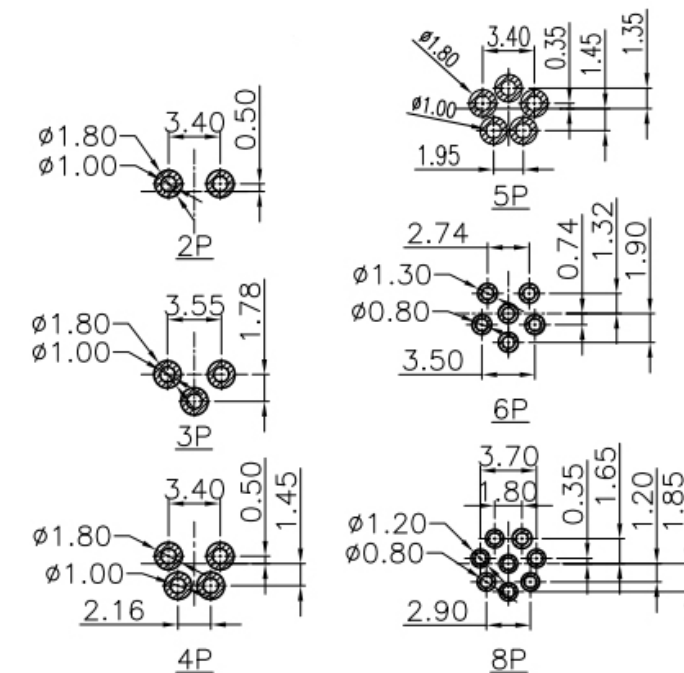

REVISION HISTORY

REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	22 08 2023	Owen Page

©2023	Date 22 08 2023	A4
-------	--------------------	----

DO NOT SCALE
Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by
Owen Page

X.X - +0.30
X.XX - +0.20

Design Right
Protected

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data
contained herein is and shall remain
the property of Cambridge Electronic
Industries Ltd and may not be used
or copied for any purpose
whatsoever without the written
permission of Cambridge Electronic
Industries Ltd.

Description:
M8 Socket Straight Front Fastened Dip Type

Part No:
CC08-XXS-FX-PB4

Issue
1.0
Sheet
1 / 1