

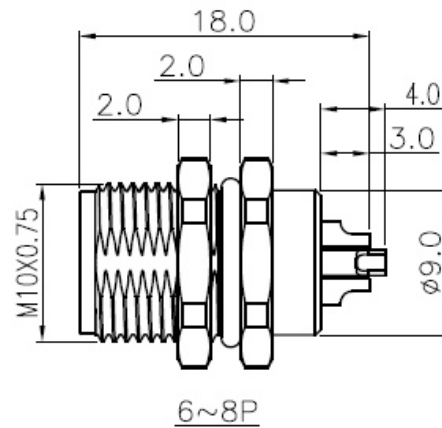
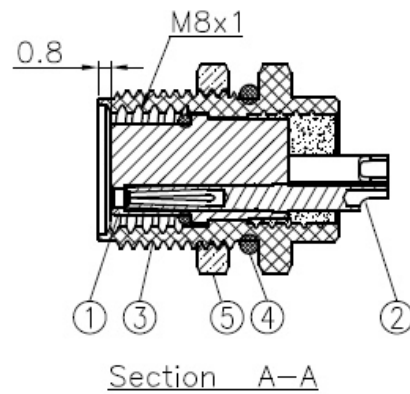
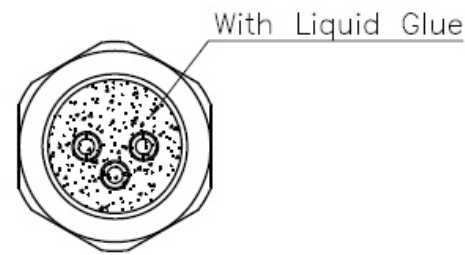
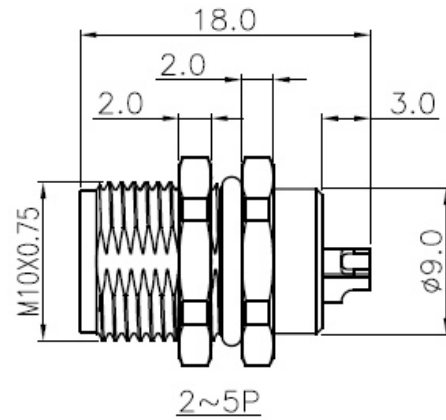
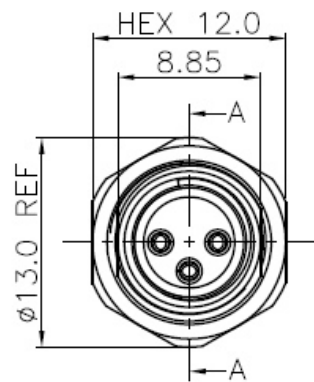


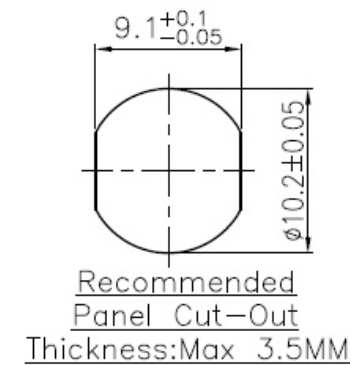

Specification:
Current Rating: 3A (2~5P); 1A(6~8P) AC/DC
Voltage Rating: 60V(2~3P); 30V(4~8P) AC/DC
Contact Resistance: 5m ohm Max.
Insulation Resistance: 100M ohm Min.
Withstanding Voltage: 500V AC/Minute (2~5P)
250V AC/Minute (6~8P)
Waterproof Rate: IP67
Operating Temperature Range: -40°C ~ +100°C

CC08-XXS-FX-PM4
Panel Lock Thread 4:M10
Panel Mount Solder
Coding: A or B
Front Fastened
Socket
No. of Contacts
M8

Pin Assignments Front View

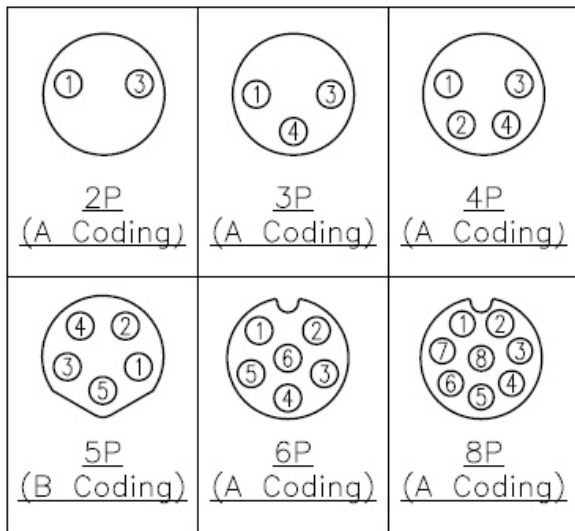

Item	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated 3u"	2~8
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Seal ring	Silicone	Red	2
5	Nut	Copper Alloy	Nickel Plated 60u"	1

DO NOT SCALE
Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by
Owen Page

X.X - +0.30
X.XX - +0.20

Design Right
Protected

©2023

Date
21 08 2023

DESIGNER
Owen Page
A3

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data
contained herein is and shall remain
the property of Cambridge Electronic
Industries Ltd and may not be used
or copied for any purpose
whatsoever without the written
permission of Cambridge Electronic
Industries Ltd.

Description:
M8 Front Fastened Socket Solder Type

Part No:
CC08-XXS-FX-PM4

Issue
1.0

Sheet
1 / 1

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	21 08 2023	Owen Page