

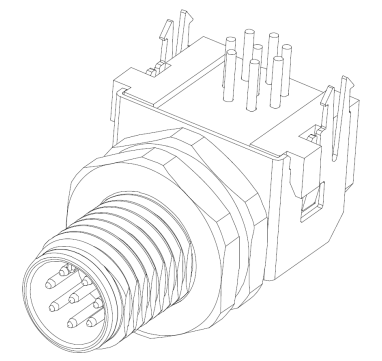
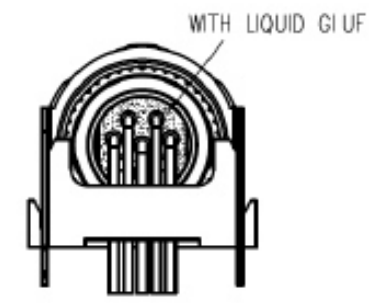
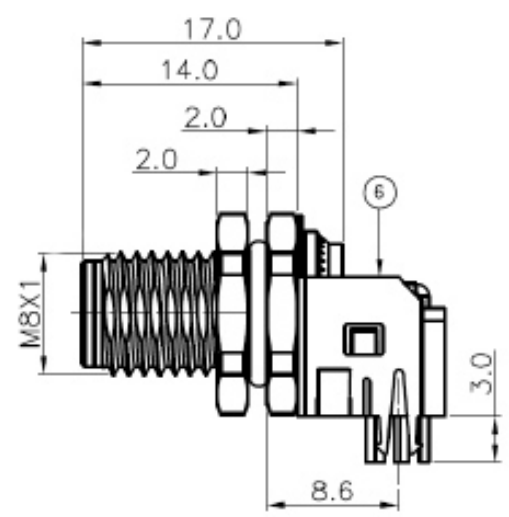


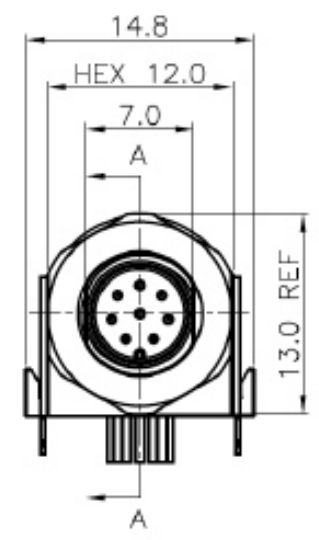


Specifications:
Current Rating: 3A AC/DC(2~5P); 1.5A AC/DC(6~8P)
Voltage Rating: 60V AC/DC(2~3P);30V AC/DC(4~8P)
Contact Resistance:10m ohm. Max. &
Insulation Resistance:100M ohm. Min.
Withstanding Voltage: 500V AC/Minute(2~5P)
250V AC/Minute (6~8P)
Waterproof Rate: IP67
Operating Temperature Range: -25°C ~ +80°C


CC08R-XXP-FX-PBS
Shielded
Panel Mount PCB Dip
Coding: A or B
Front Fastened
Plug
No. of Contacts
R/A
M8

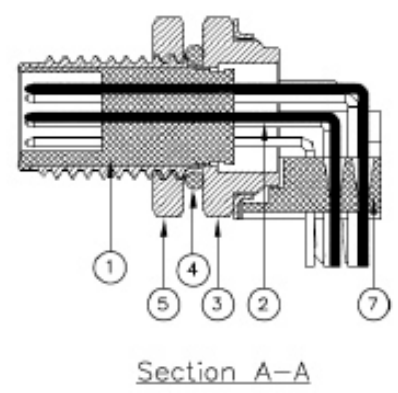


Pin Assignments Front View

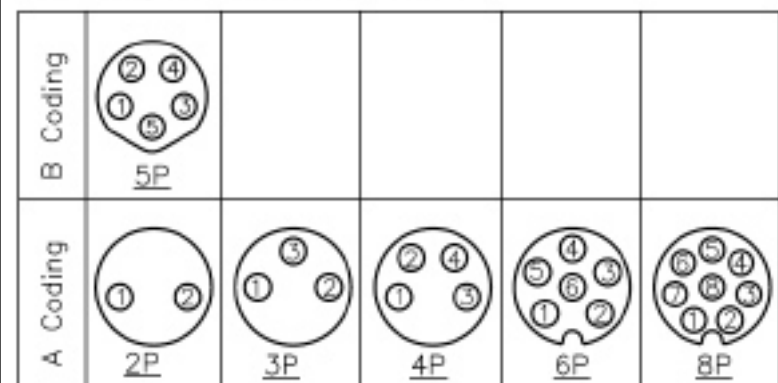

Item	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated 3u"	2~8
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Seal Ring	Silicone	Red	1
5	Nut	Copper Alloy	Nickel Plated 60u"	1
6	Shielded Shell	Copper Alloy	Gold Plated	1
7	Cover	Nylon	UL94V-0 Black	1

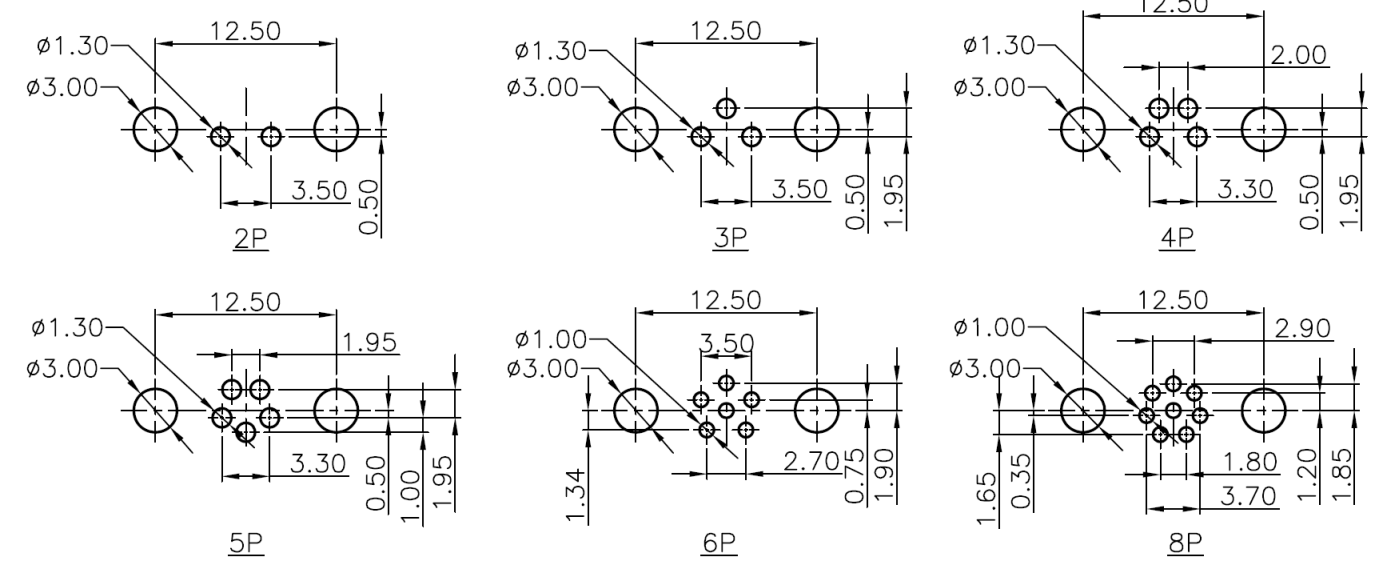

Recommended P.C.B Layout

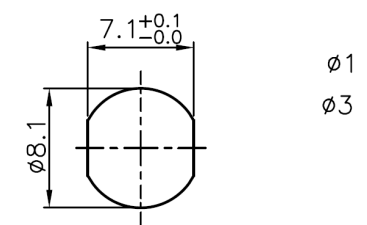

Recommended Panel Cut-Out
Thickness:Max 3.5MM

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	21 08 2023	Owen Page

DO NOT SCALE	Third Angle Projection	Designed by Owen Page	X.X - +0.20 X.XX - +0.15 X.XXX - +0.10	Design Right Protected	©2023	Date 21 08 2023	A4
Unit of Measure: millimetres (mm)			Description: M8 Plug R/A Dip Shielded Type				
Part No: CC08R-XXP-FX-PBS						Issue 1.0	Sheet 1 / 1

RoHS Compliant

Cambridge Electronic Industries Ltd

This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.