

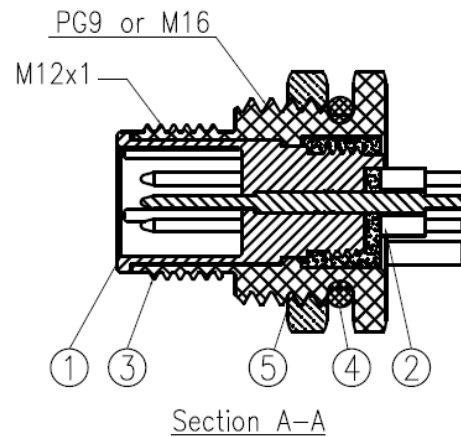
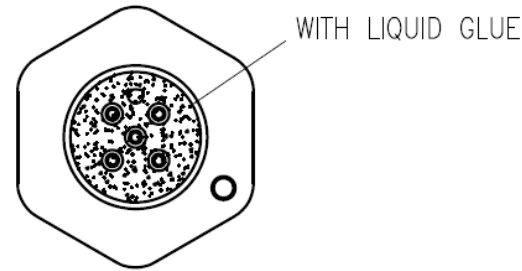
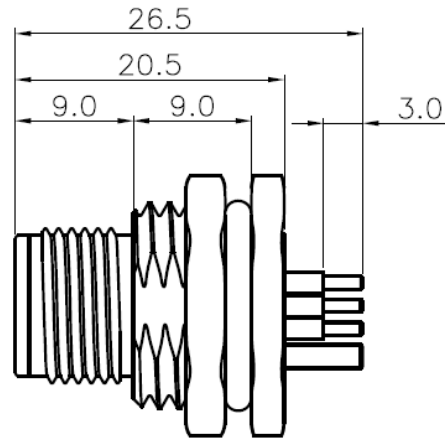


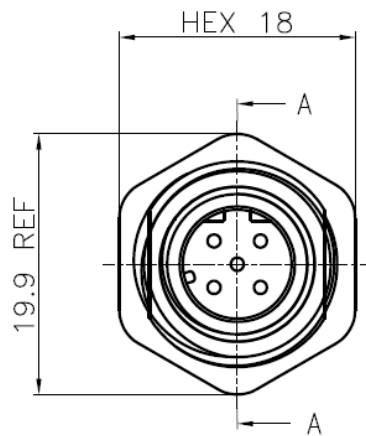


Specifications:
Current Rating: 4A AC/DC
Voltage Rating: 250V (2~4P); 60V (5P) AC/DC
Contact Resistance: 5m ohm Max.
Insulation Resistance: 100M ohm Min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -40°C ~ +100°C
Waterproof Rate: IP67


CC12-XXP-FD07-PBSX
Panel Lock Thread
With Shielding
Panel Mount PCB Dip
Die Casting
Front Fastened D Coding
Plug
No. of Positions
M12




M16 Recommended
Panel CUT-OUT
Thickness 4.0 Max.



PG9 Recommended
Panel CUT-OUT
Thickness 4.0 Max.

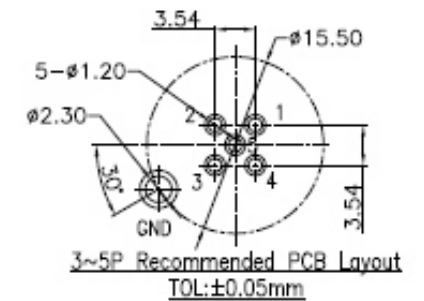

Pin Assignments Front View

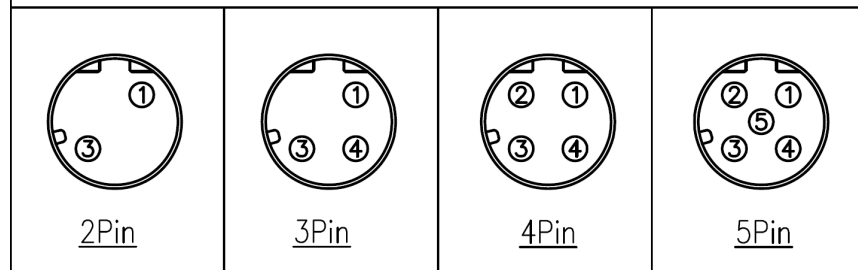

ITEM	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated 1u"	2~5
3	Shell	Zinc Alloy	Nickel Plated 60u"	1
4	Seal ring	Silicone	Red	1
5	Nut	Copper Alloy	PG9 or M16 Nickel Plated 60u"	1

REVISION HISTORY

REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	22 08 2023	Owen Page

DO NOT SCALE
Unit of Measure: millimetres (mm)



Designed by
Owen Page

X.X - +0.30
X.XX - +0.20

Design Right
Protected

©2023

Date
22 08 2023

A4

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data
contained herein is and shall remain
the property of Cambridge Electronic
Industries Ltd and may not be used
or copied for any purpose
whatsoever without the written
permission of Cambridge Electronic
Industries Ltd.

Description:

M12 D Code Plug With Shielding Straight Dip Type

Part No:
CC12-XXP-FD07-PBSX

Issue
1.0

Sheet
1 / 1