






General Description

The CC12-XXP-FD07-PBX is a M12 circular plug connector which is available with 2 to 5 pin options in a D coding. The connector features straight pins to the rear for mounting directly to a PCB. The M12 connectors are designed for use in industrial applications and feature a small and robust design which has a waterproof rating to IP67, which protects your equipment from entry of water or dust into your system.

Specification	
Coding	D
Contact	2 to 5 Pins
Current Rating	4A AC/DC (2 to 5 Pins)
Voltage Rating	250V AC/DC (2 to 4 Pins) 60V AC/DC (5 Pins)
Contact Resistance	$\leq 5\text{m}\Omega$
Insulation Resistance	$\geq 100\text{M}\Omega$
Withstanding Voltage	500V AC/Minute (2 to 5 Pins)
Operating Temperature	-40°C to +100°C
Waterproof Rating	IP67
Material Plating	
Insulator	UL94V-0 Black
Connector Contacts	Brass Gold Plated
Seal Ring	Red Silicone
Shell	Zinc Alloy Nickel Plated

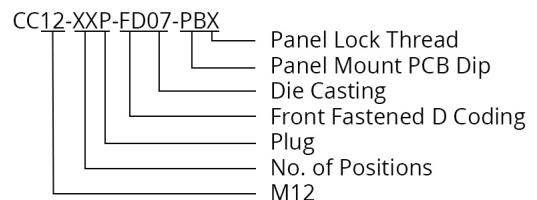

Pin Assignments Front View

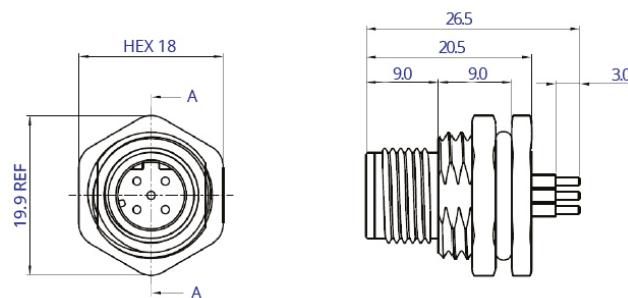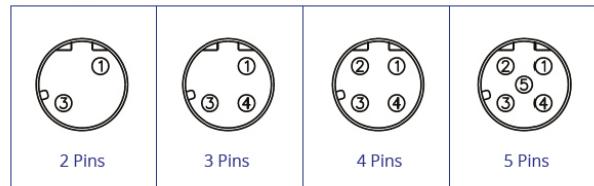

Section A-A

Drawing Issue 1.0

Website: www.CambridgeElectronics.com
Email: sales@cambridgeelectronics.com