

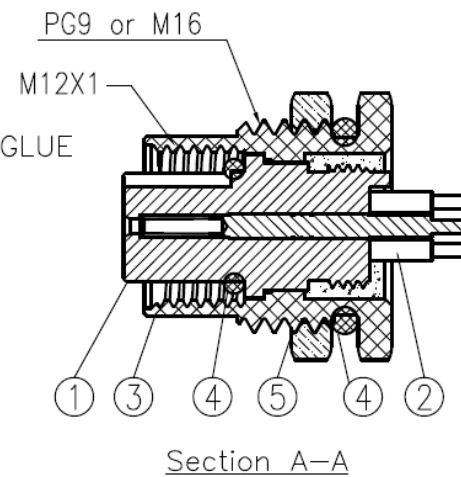
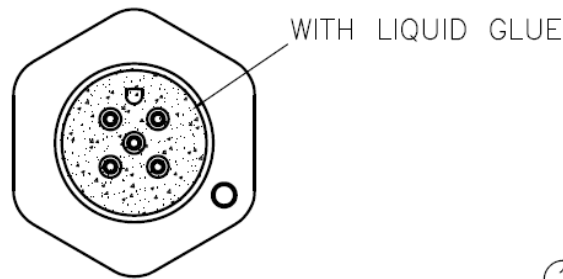


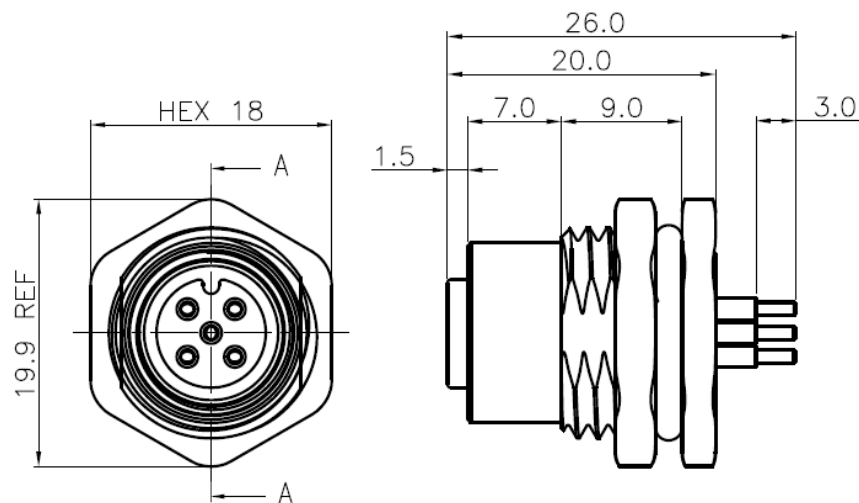


Specifications:
Current Rating: 4A (2~5P); 2A (6~8P); 1.5A(9~12P) AC/DC
Voltage Rating: 250V (3~4P); 60V (5P); 30V (6~12P) AC/DC
Contact Resistance: 5m ohm Max.
Insulation Resistance: 100M ohm Min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -40°C ~ +100°C
Waterproof Rate: IP67


CC12-XXS-FA07-PBX
Panel Lock Thread
Panel Mount PCB Dip
Die Casting
Front Fastened A Coding
Socket
No. of Positions
M12

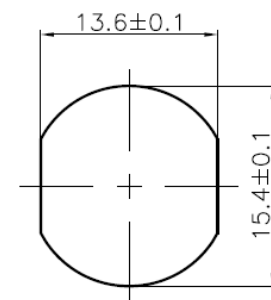


PG9 Recommended Panel CUT-Out
Thickness:4.0mm




2~5P Recommended PCB Layout
TOL:±0.05mm

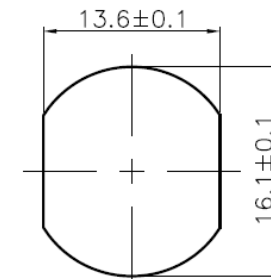

M16 Recommended Panel CUT-Out
Thickness:4.0mm

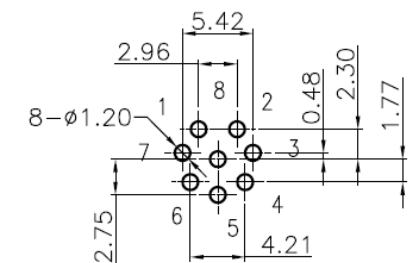

6~8P Recommended PCB Layout
TOL:±0.05mm

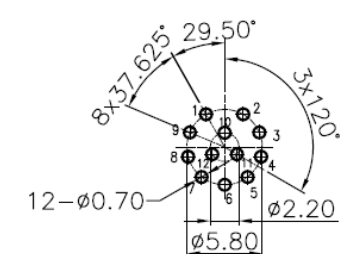

9~12P Recommended PCB Layout
Tolerance:±0.05mm

Pin Assignments Front View

2Pin	3Pin	4Pin	5Pin	6Pin	7Pin
8Pin	9Pin	10Pin	11Pin	12Pin	

ITEM	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated 1u"	2~12
3	Shell	Zinc Alloy	Nickel Plated 60u"	1
4	Seal ring	Silicone	Red	2
5	Nut	Copper Alloy	PG9 or M16 Nickel Plated 60u"	1

DO NOT SCALE
Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by
Owen Page

X.X - +0.30
X.XX - +0.20

Design Right
Protected

©2023

Date
22 08 2023

DESIGNER
Owen Page

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.

Description:

M12 A Code Socket Straight Dip Type

Part No:
CC12-XXS-FA07-PBX

Issue
1.0

Sheet
1 / 1