

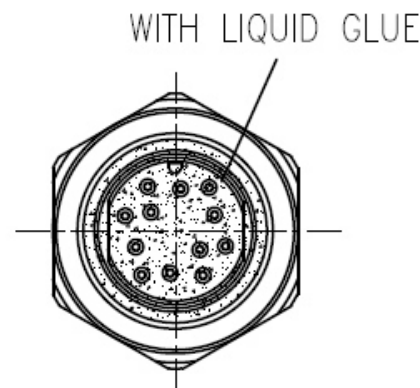
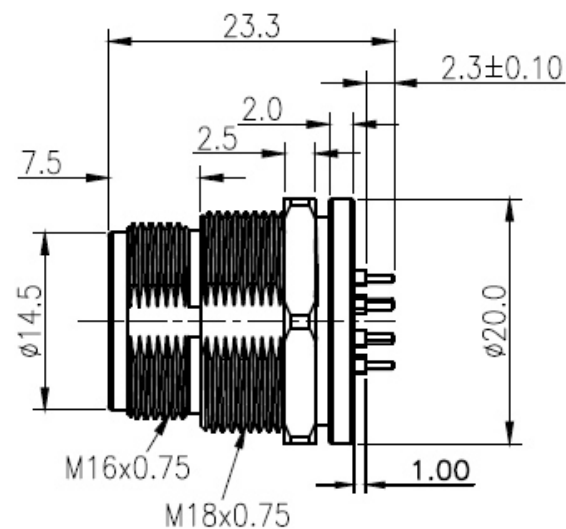


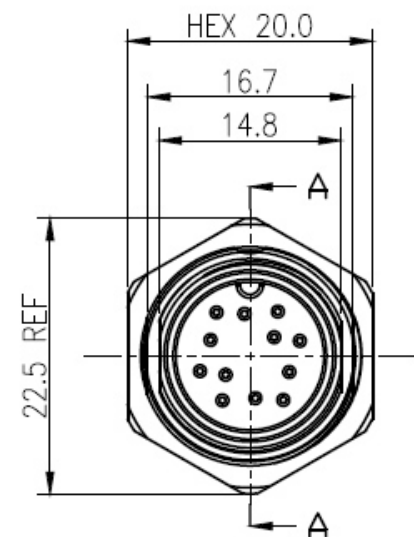


Specifications:
Current Rating: 5A (6~8P); 3A (12~14P) AC/DC
Voltage Rating: 60V AC/DC
Contact Resistance: 5m ohm Max.
Insulation Resistance: 100M ohm Min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -40°C ~ +100°C

CC16-XXP-FA-PB90XX


Blank: Gold Plated 3u", 15: Gold Plated 15u"
M18
Panel Mount PCB Dip
A Coding
Plug
No. of Contacts
M16

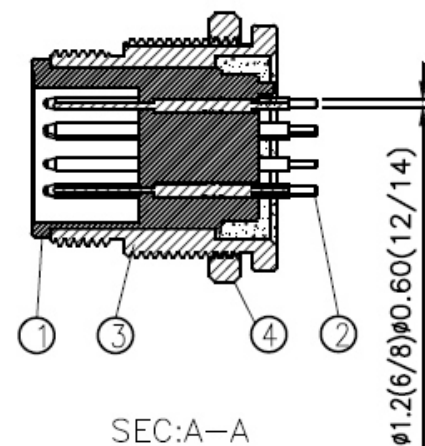

Pin Assignments Front View

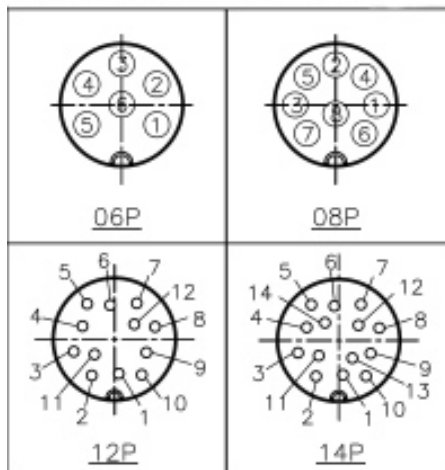

ITEM	Description	Material	Remark	Q'TY
1	Insulator	Nylon	UL94V-0 Black	1
2	Terminal	Copper Alloy	Gold Plated	6~14
3	Shell	Copper Alloy	Nickel Plated 60u"	1
4	Nut	Copper Alloy	M18 Nickel Plated 60u"	1

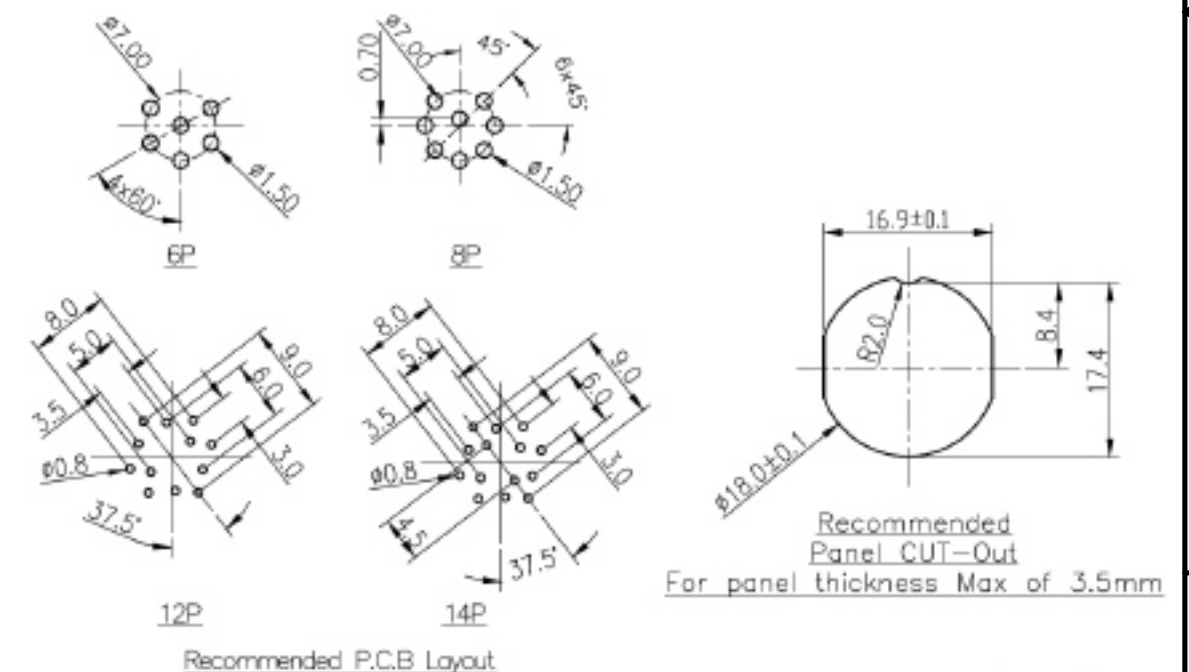

REVISION HISTORY

REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	22 08 2023	Owen Page

DO NOT SCALE
Unit of Measure: millimetres (mm)



Designed by
Owen Page

X.X - +0.30
X.XX - +0.20

Design Right
Protected

©2023

Date
22 08 2023

A4

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.

Description:

M16 A Code Plug Straight Type

Part No:

CC16-XXP-FA-PB90XX

Issue
1.0

Sheet
1 / 1