




PIN ASSIGNMENTS FRONT VIEW




4P







6P



7P




20P

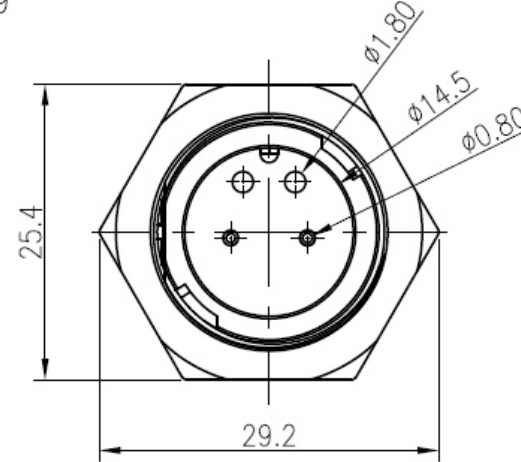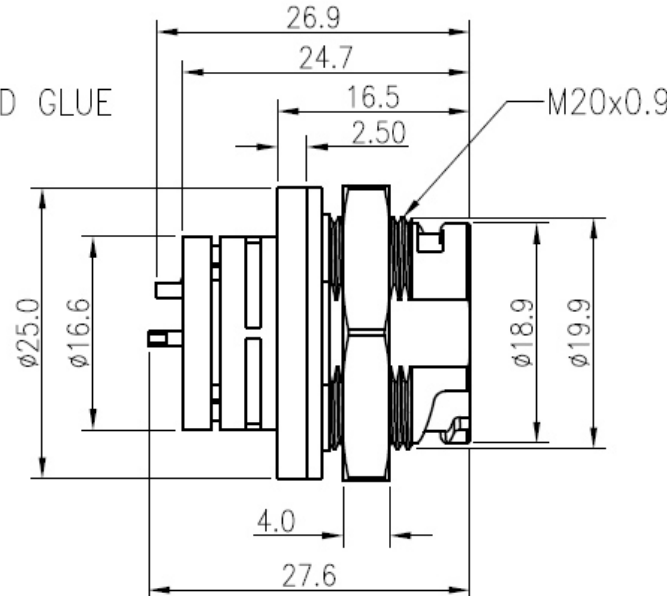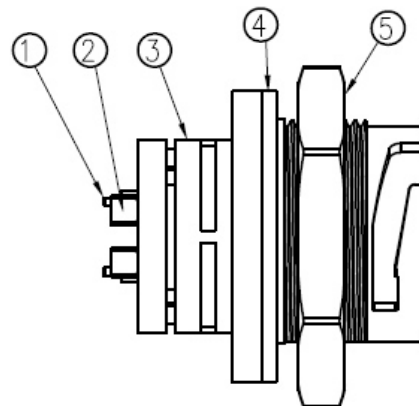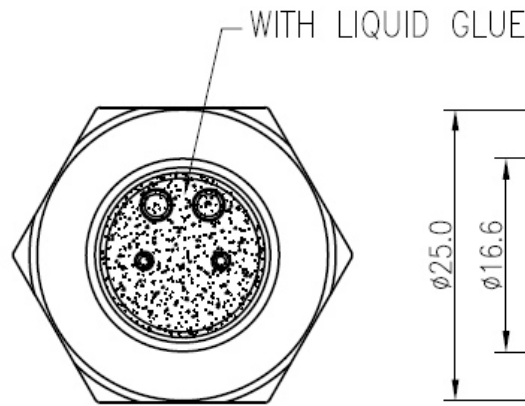

Specifications:
Current Rating: Pin A, B and C: 15A Max
Other Pins: 2A Max
Voltage Rating: 220V (15A Pin)
60V (2A Pins)
Contact Resistance: 5mΩ Max
Insulation Resistance 100MΩ Min
Withstanding Voltage: 1000V AC/Minute
Operating Temperature Range: -25°C ~ +80°C
Waterproof Rate: IP67

CC20-XXP-FA02-PM
Panel Mount Solder
Quick Lock
Front Fastened A Coding
Plug
No. of Positions
M20

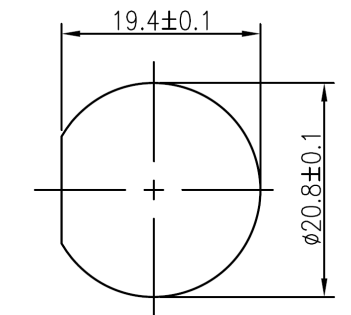

Recommended Panel CUT-Out

Item	Description	Material	Remark	Q'TY
1	PIN A,B	Copper Alloy	Gold Plated	2
2	Other PIN	Copper Alloy	Gold Plated	2~18
3	Insulator	Nylon	UL94V-0 Black	1
4	O-Ring	Silicone	Red	1
5	Nut	Copper Alloy	Nickel Plated	1

DO NOT SCALE

Unit of Measure: millimetres (mm)

Third Angle Projection

RoHS Compliant

Cambridge Electronic Industries Ltd

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	22 08 2023	Owen Page
©2023			Date 22 08 2023	A4
Description: Waterproof Plug			Issue 1.0	Sheet 1 / 1
Part No: CC20-XXP-FA02-PM				