


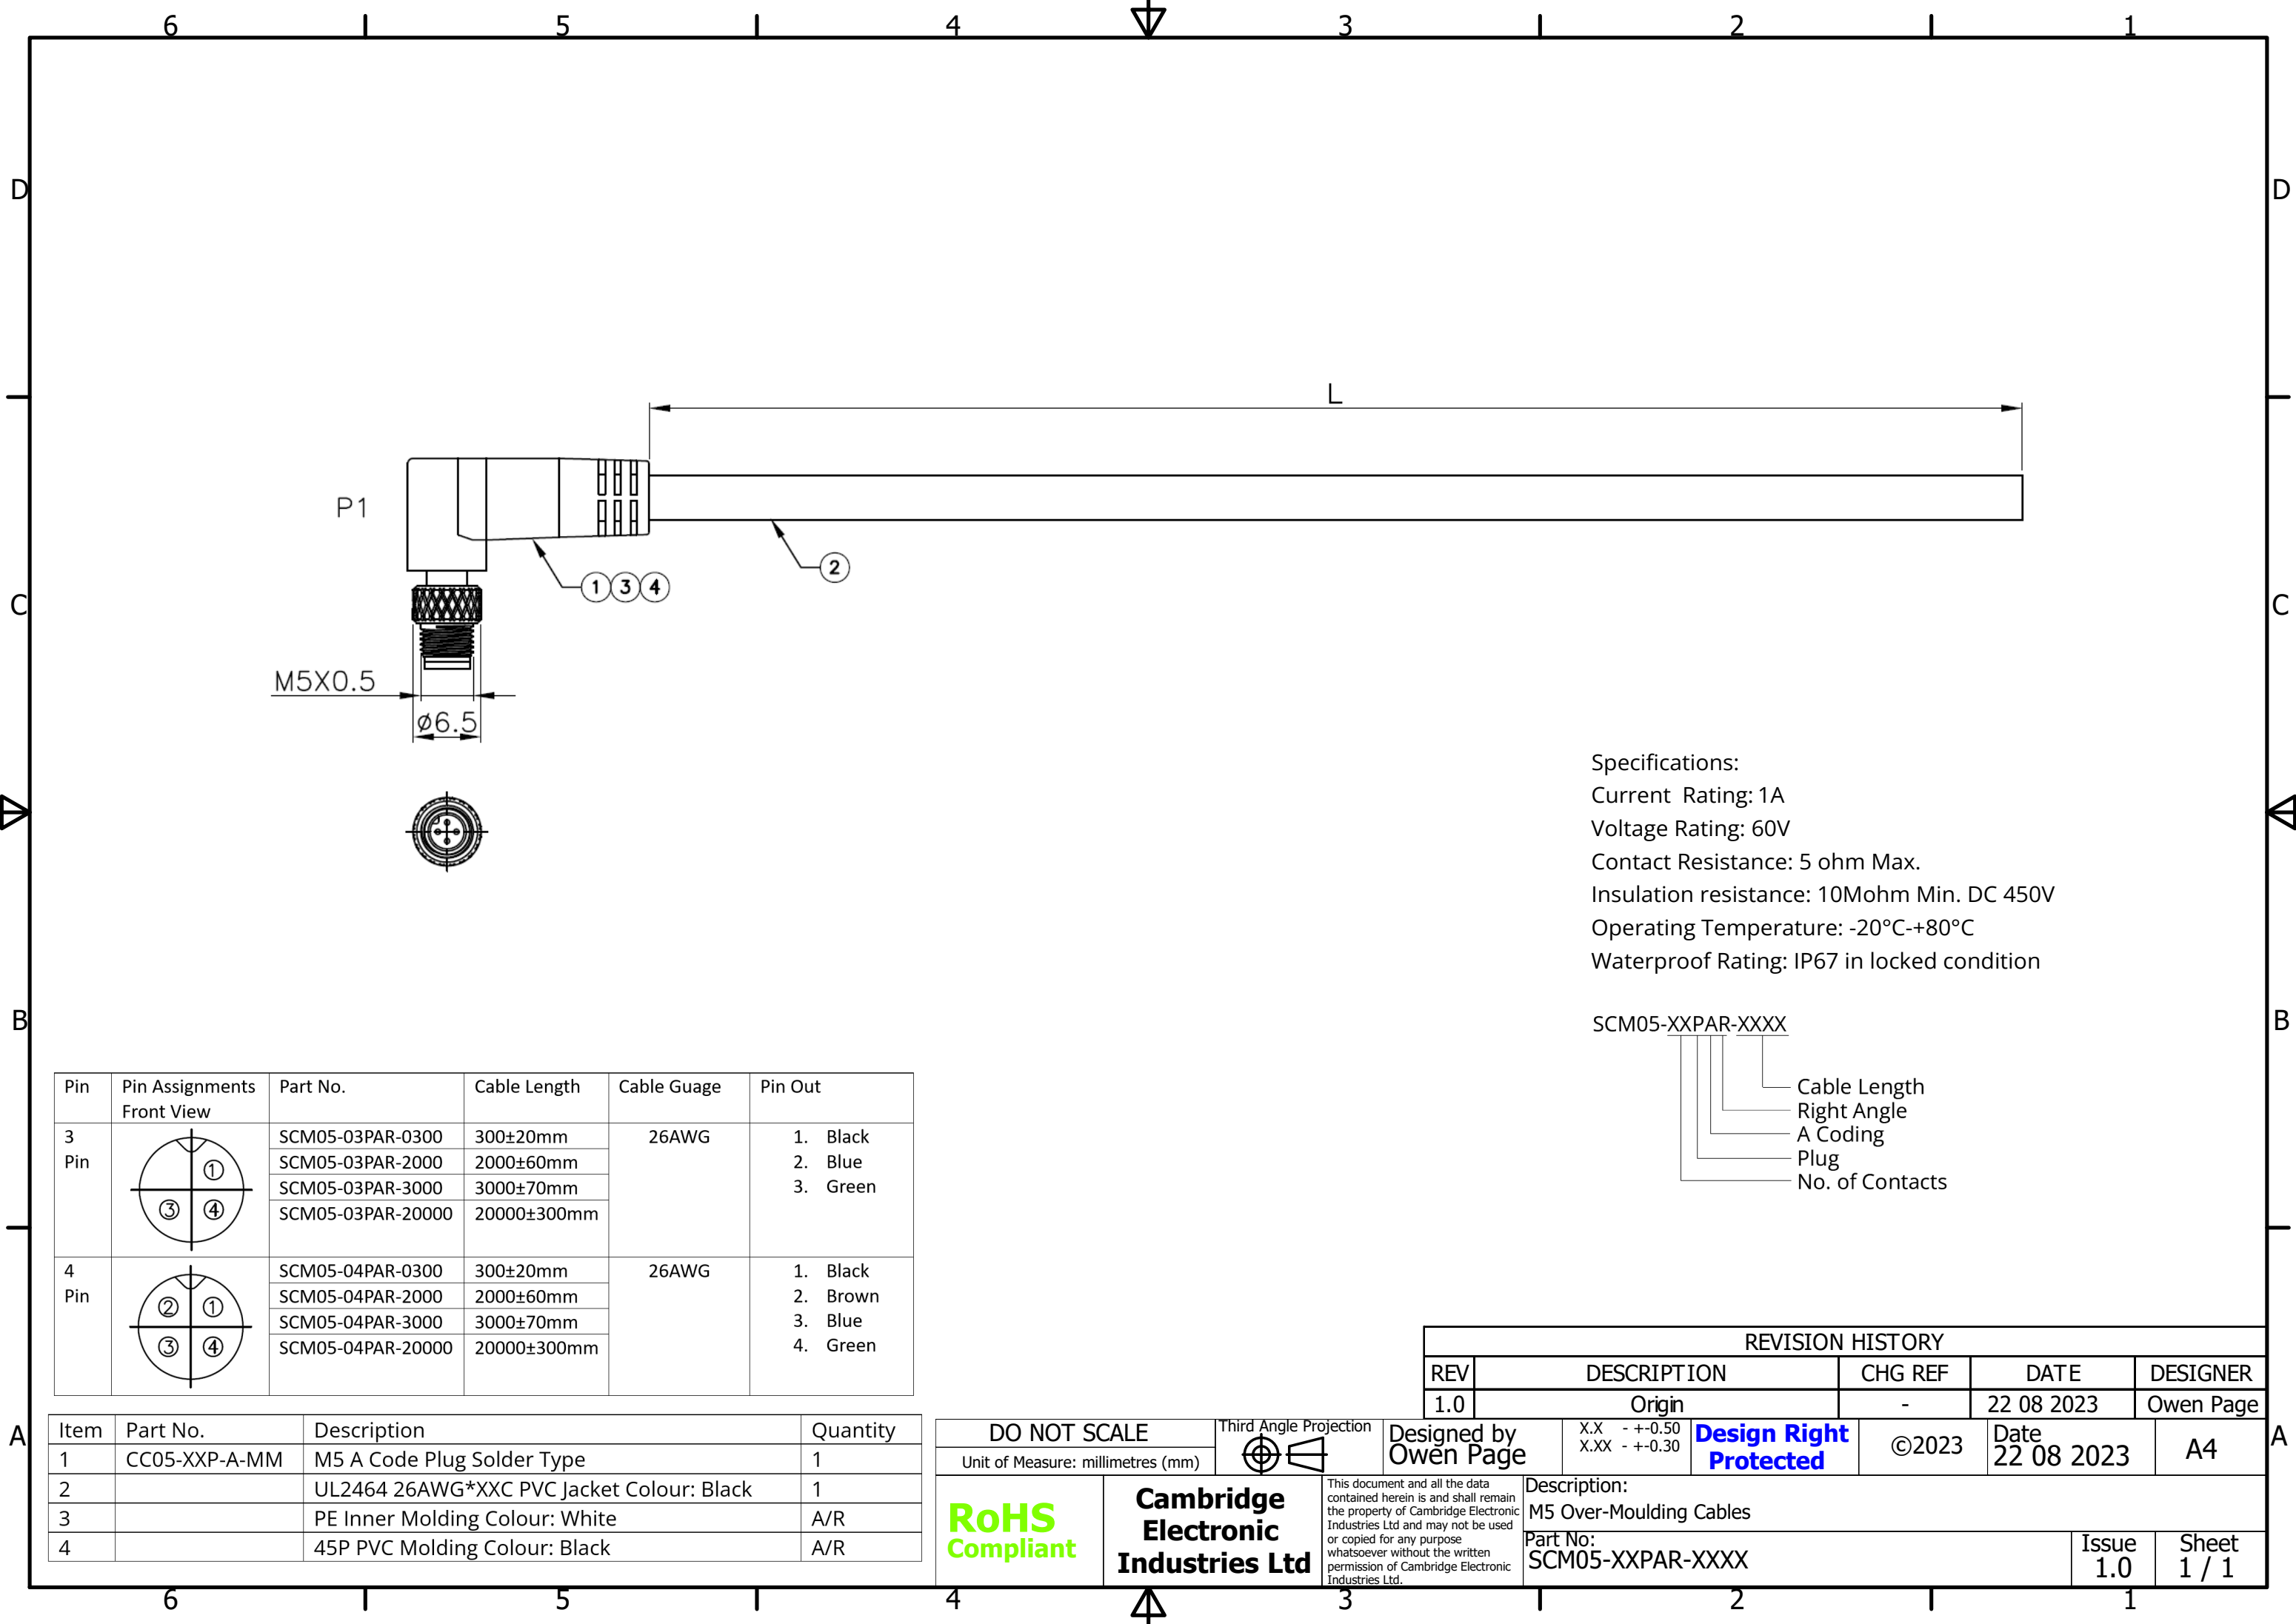

Specifications:
Current Rating: 1A
Voltage Rating: 60V
Contact Resistance: 5 ohm Max.
Insulation resistance: 10Mohm Min. DC 450V
Operating Temperature: -20°C-+80°C
Waterproof Rating: IP67 in locked condition

SCM05-XXPAR-XXXX

- Cable Length
- Right Angle
- A Coding
- Plug
- No. of Contacts

Pin	Pin Assignments Front View	Part No.	Cable Length	Cable Gauge	Pin Out
3 Pin		SCM05-03PAR-0300	300±20mm	26AWG	1. Black 2. Blue 3. Green
		SCM05-03PAR-2000	2000±60mm		
		SCM05-03PAR-3000	3000±70mm		
		SCM05-03PAR-20000	20000±300mm		
4 Pin		SCM05-04PAR-0300	300±20mm	26AWG	1. Black 2. Brown 3. Blue 4. Green
		SCM05-04PAR-2000	2000±60mm		
		SCM05-04PAR-3000	3000±70mm		
		SCM05-04PAR-20000	20000±300mm		

Item	Part No.	Description	Quantity
1	CC05-XXP-A-MM	M5 A Code Plug Solder Type	1
2		UL2464 26AWG*XXC PVC Jacket Colour: Black	1
3		PE Inner Molding Colour: White	A/R
4		45P PVC Molding Colour: Black	A/R

DO NOT SCALE

Unit of Measure: millimetres (mm)

Third Angle Projection

Designed by
Owen Page

X.X - +-0.50

X.XX - +-0.30

RoHS
Compliant

Cambridge
Electronic
Industries Ltd

This document and all the data
contained herein is and shall remain
the property of Cambridge Electronic
Industries Ltd and may not be used
or copied for any purpose
whatsoever without the written
permission of Cambridge Electronic
Industries Ltd.

Description:
M5 Over-Moulding Cables

Part No:
SCM05-XXPAR-XXXX

©2023

22 08 2023

Issue
1.0

Sheet
1 / 1

REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	22 08 2023	Owen Page