

## General Description

This high quality cable mounted plug is designed for professional microphone and audio-visual equipment wiring. Fully compliant with IEC 61076-2-103, it delivers outstanding electrical performance and long term reliability in demanding environments.

The connector body is manufactured from precision die cast zinc alloy, lathe finished for consistency, and nickel plated to ensure durability and an attractive surface finish. A high strength, temperature resistant PBT insulator provides excellent electrical insulation and high-voltage resistance.

The contact pins are produced from high purity brass and plated in nickel to ensure efficient conductivity and extended mating life. A metal gland and PVC strain relief accommodate cable diameters between 6 and 7mm, providing secure retention during installation.



## Electrical

Current Rating	3 Pin - 16A 4 and 5 Pin - 10A
Dielectric Withstanding Voltage	1500V DC
Contact Resistance	<3mΩ
Insulation Resistance	>2GΩ
Capacitance between contacts	3 Pin - ≤4Pf, 4 and 5 Pin - ≤7Pf

## Environmental

Insertion Force	≤20N
Mating Cycles	>1000




## Materials

Centre Pins	Brass/Nickel
Metal Parts	Zinc/ Nickel

## Processing

Cable OD	6.0 to 7.0mm
AWG	3 Pin - 2.5mm/14AWG, 4 Pin - 1.5mm/16AWG 5 Pin - 1.0mm/18AWG

Available in different pin variations :  
 AXCS-3P-ZNDN3-M – 3 Pin  
 AXCS-4P-ZNDN3-M – 4 Pin  
 AXCS-5P-ZNDN3-M – 5 Pin

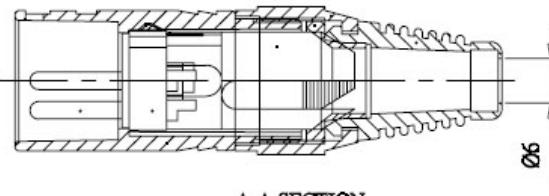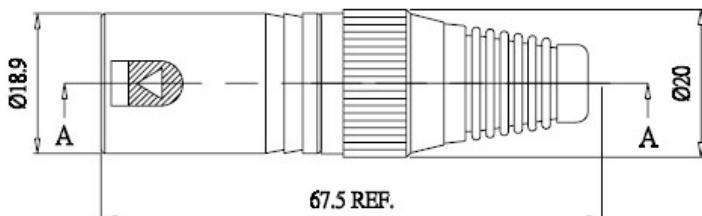

A-A SECTION