

6 5 4 3 2 1

Specification

Electrical:



Current Rating Per Contact: 6A
Dielectric Strength: 1500VDC
Contact Resistance: <5m Ohm
Insulation Resistance: >1G Ohm

Materials:

Body: PA6 (Nylon)
Pin: Brass / Gold

Environmental:

Mating Cycles: >1000
Insertion Force: ≤20N
AWG: 24 to 26 AWG
Temp Range: -30°C to +80°C

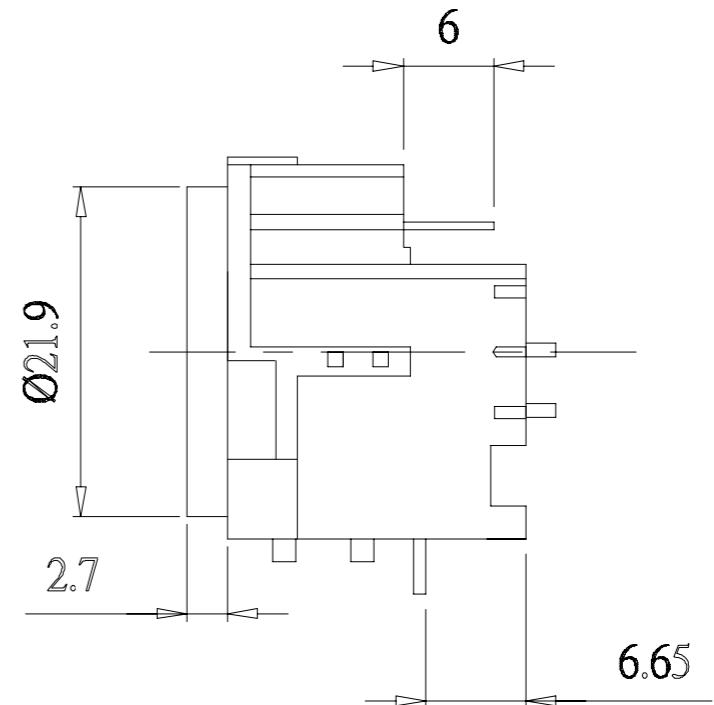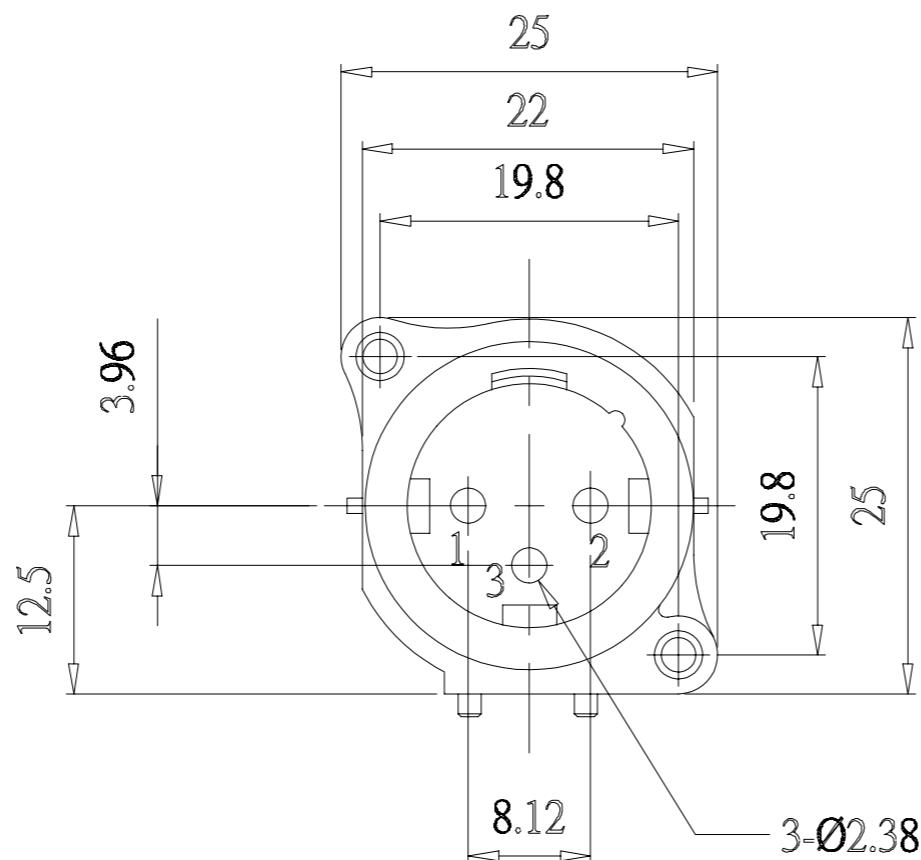

Wires Size: 24AWG and 26 AWG

REVISION HISTORY

REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin	-	24/Jul/2025	M. Smith

DO NOT SCALE		Third Angle Projection	Designed by Martin Smith	X.X - +0.20 X.XX - +0.10 X.XXX - +0.05	Design Right Protected	©2025	Date 24 Jul 2025	A3
Unit of Measure: millimetres (mm)								
RoHS Compliant	Cambridge Electronic Industries Ltd	This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.	Description: 3 Pin XLR plug with plastic, panel mount, brass gold plated pin (solder bucket)					
			Part No: AXPS-3P-P1DGB	Issue 1.0	Sheet 1 / 1			

6 5 4 3 2 1