


General Description


The XGS-06-RB32-GGD is a dual port right angle PCB bulkhead mounted connector which conforms to the standard of SMPTE ST 2081-1 and CXP-6, allowing bit-rates of 5.94Gbit/s over a single coaxial connection. The connector is designed for Multi Layer PCB applications which require a leg length of 3.2mm.

This connector is available as:
XGS-06-RB32-GGD as a connector only part
XGS-06-RB32-GGD-AZ supplied with 2 x 2 Slot Circular Nut

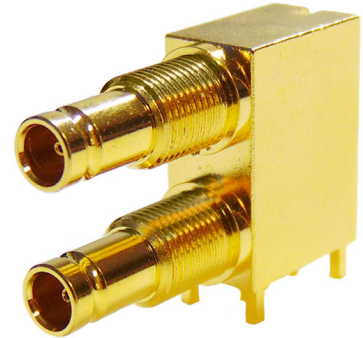

Electrical

Impedance	75Ω	
Frequency Range	0-6GHz	
Working Voltage	250Vrms	
Reflection Factor (VSWR)	1.14 (max) 0-3GHz 1.31 (max) 3-6GHz	
Dielectric Withstanding Voltage	750Vrms	
Insulation Resistance	≥1000MΩ	
Contact Resistance	Centre Contact	≤ 4.0mΩ
	Outer Contact	≤ 2.5mΩ




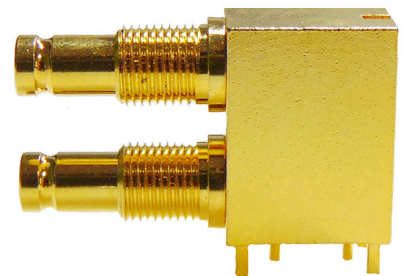


Materials

Centre Pin	BeCu / 10 μ" Au
Metal Parts	Brass/Au
Insulators	PTFE

Environmental

Connector Type	DIN 1.0/2.3 Female
Temp Range	-65 to +85°C
Mating Cycles	500

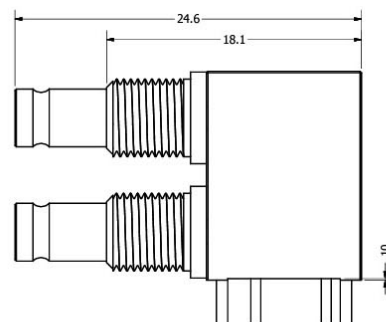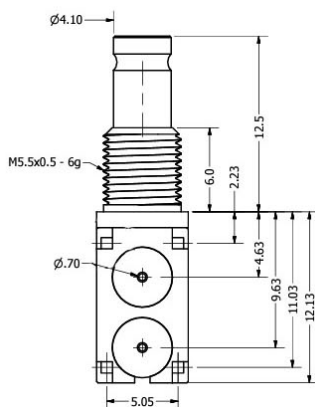

PCB Footprint

8.80

3.10 MAX

5.00

2.40

5.05

Ø0.90

Ø0.90

Ø1.40

Connector Front

