


General Description

Our range of 12GHz Precision Micro BNC coaxial connectors are optimised for 4K/Quad HD and Ultra HD Broadcast applications whilst meeting the J11A CXP-12 CoaXPress specification. These high performance connectors allow you to achieve a 12GHz channel in one single connection. The Micro BNC connectors are mateable with any standard Micro BNC connector. The XPS-12-TE25-GGIL connector is a PCB top entry Micro BNC bulkhead which features 3 mounting pins and has a long body profile. The connector is suitable for PCB's up to 2.4mm thick.



Electrical

Impedance	75Ω
Frequency Range	0-12GHz
Working Voltage	170Vrms
Reflection Factor (VSWR)	1.04 (max) 0-6GHz 1.08 (max) 6-12GHz
Dielectric Withstanding Voltage	500Vrms
Insulation Resistance	≥1000MΩ
Contact Resistance	Centre Contact ≤ 5.0mΩ
	Outer Contact ≤ 2.5mΩ

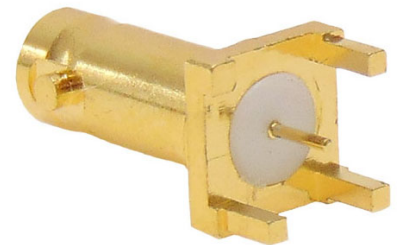


Materials


Centre Pin	BeCu / 10 μ"Au
Metal Parts	Brass/Au
Insulators	PTFE

Environmental

Connector Type	Micro BNC Female
Temp Range	-65 to +85°C
Mating Cycles	500

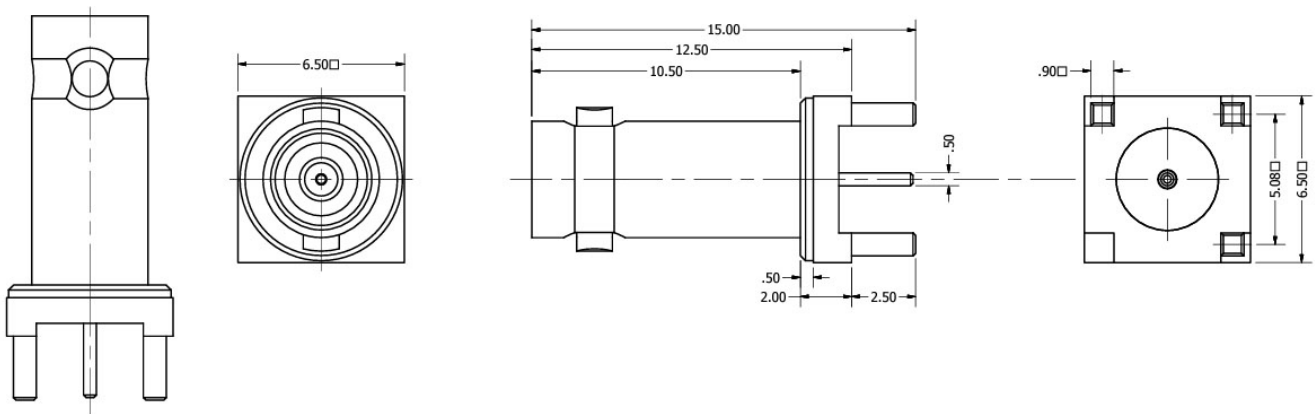

Return Loss Graph

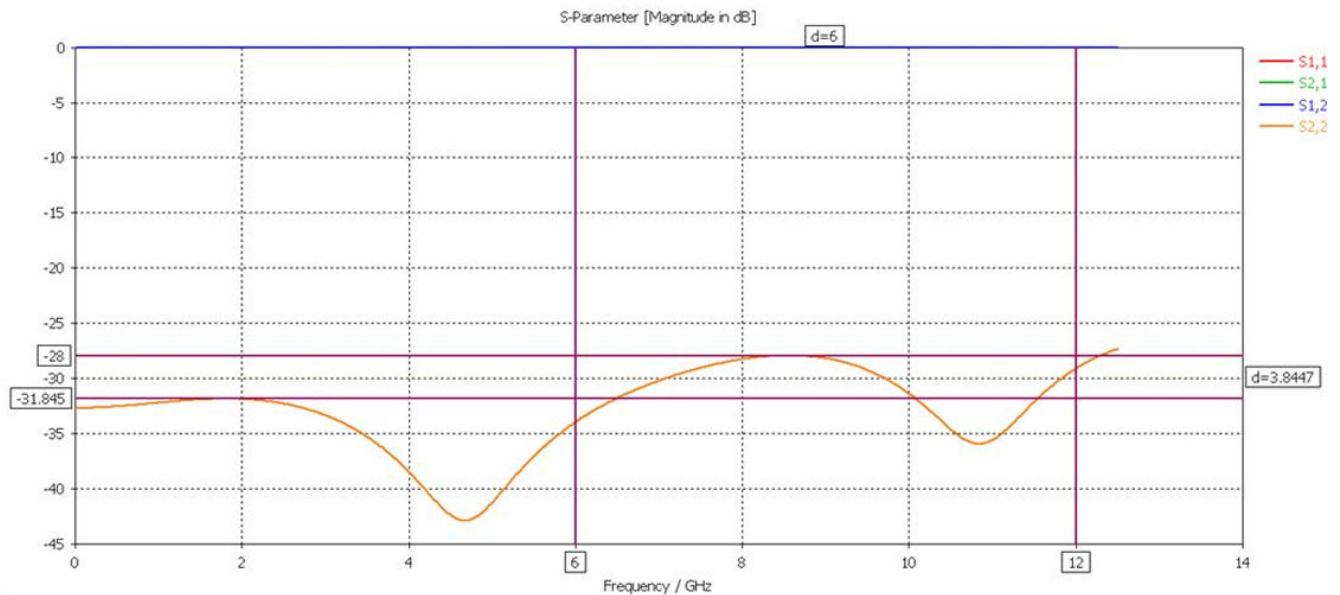

PCB Layout

