

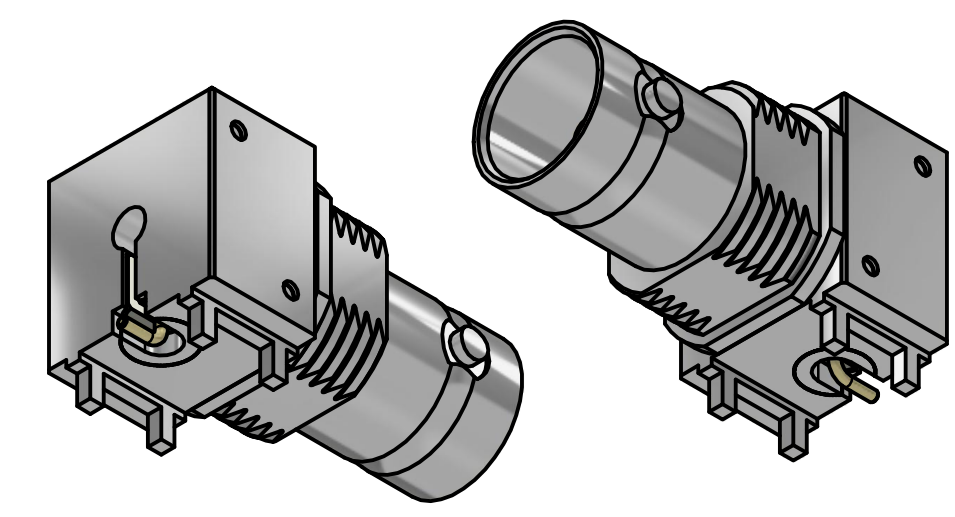
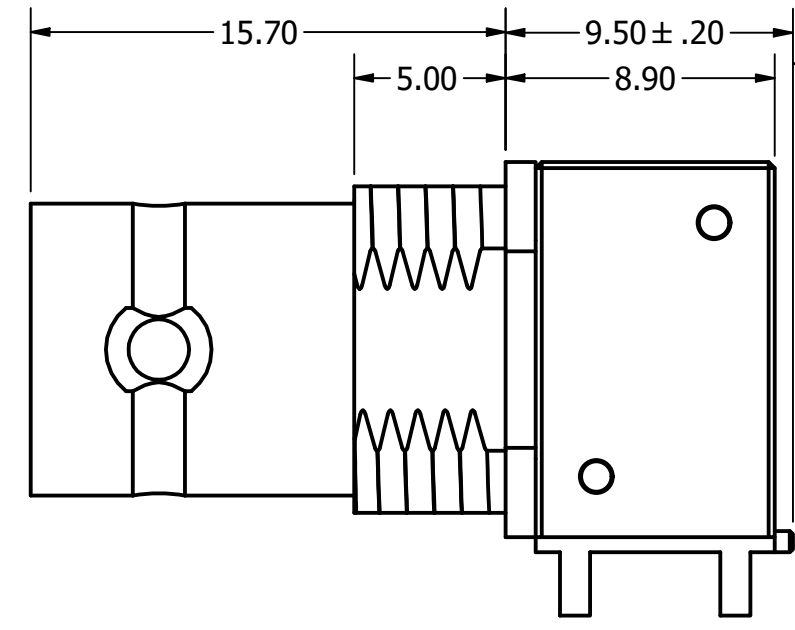
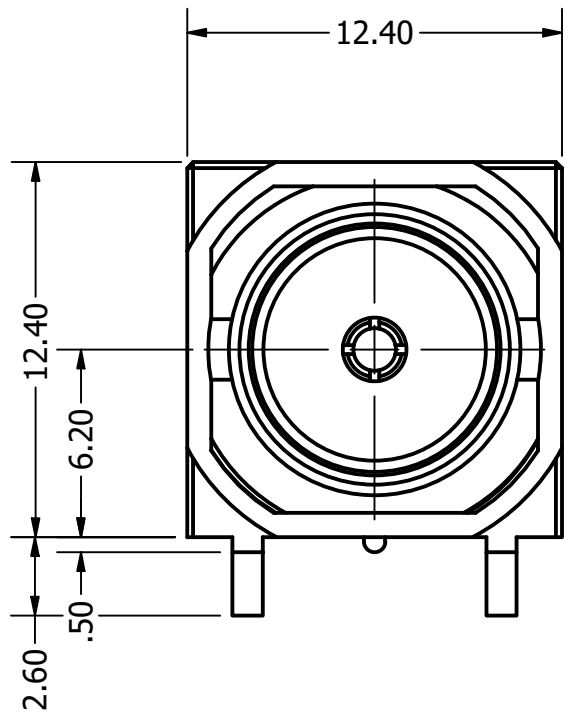


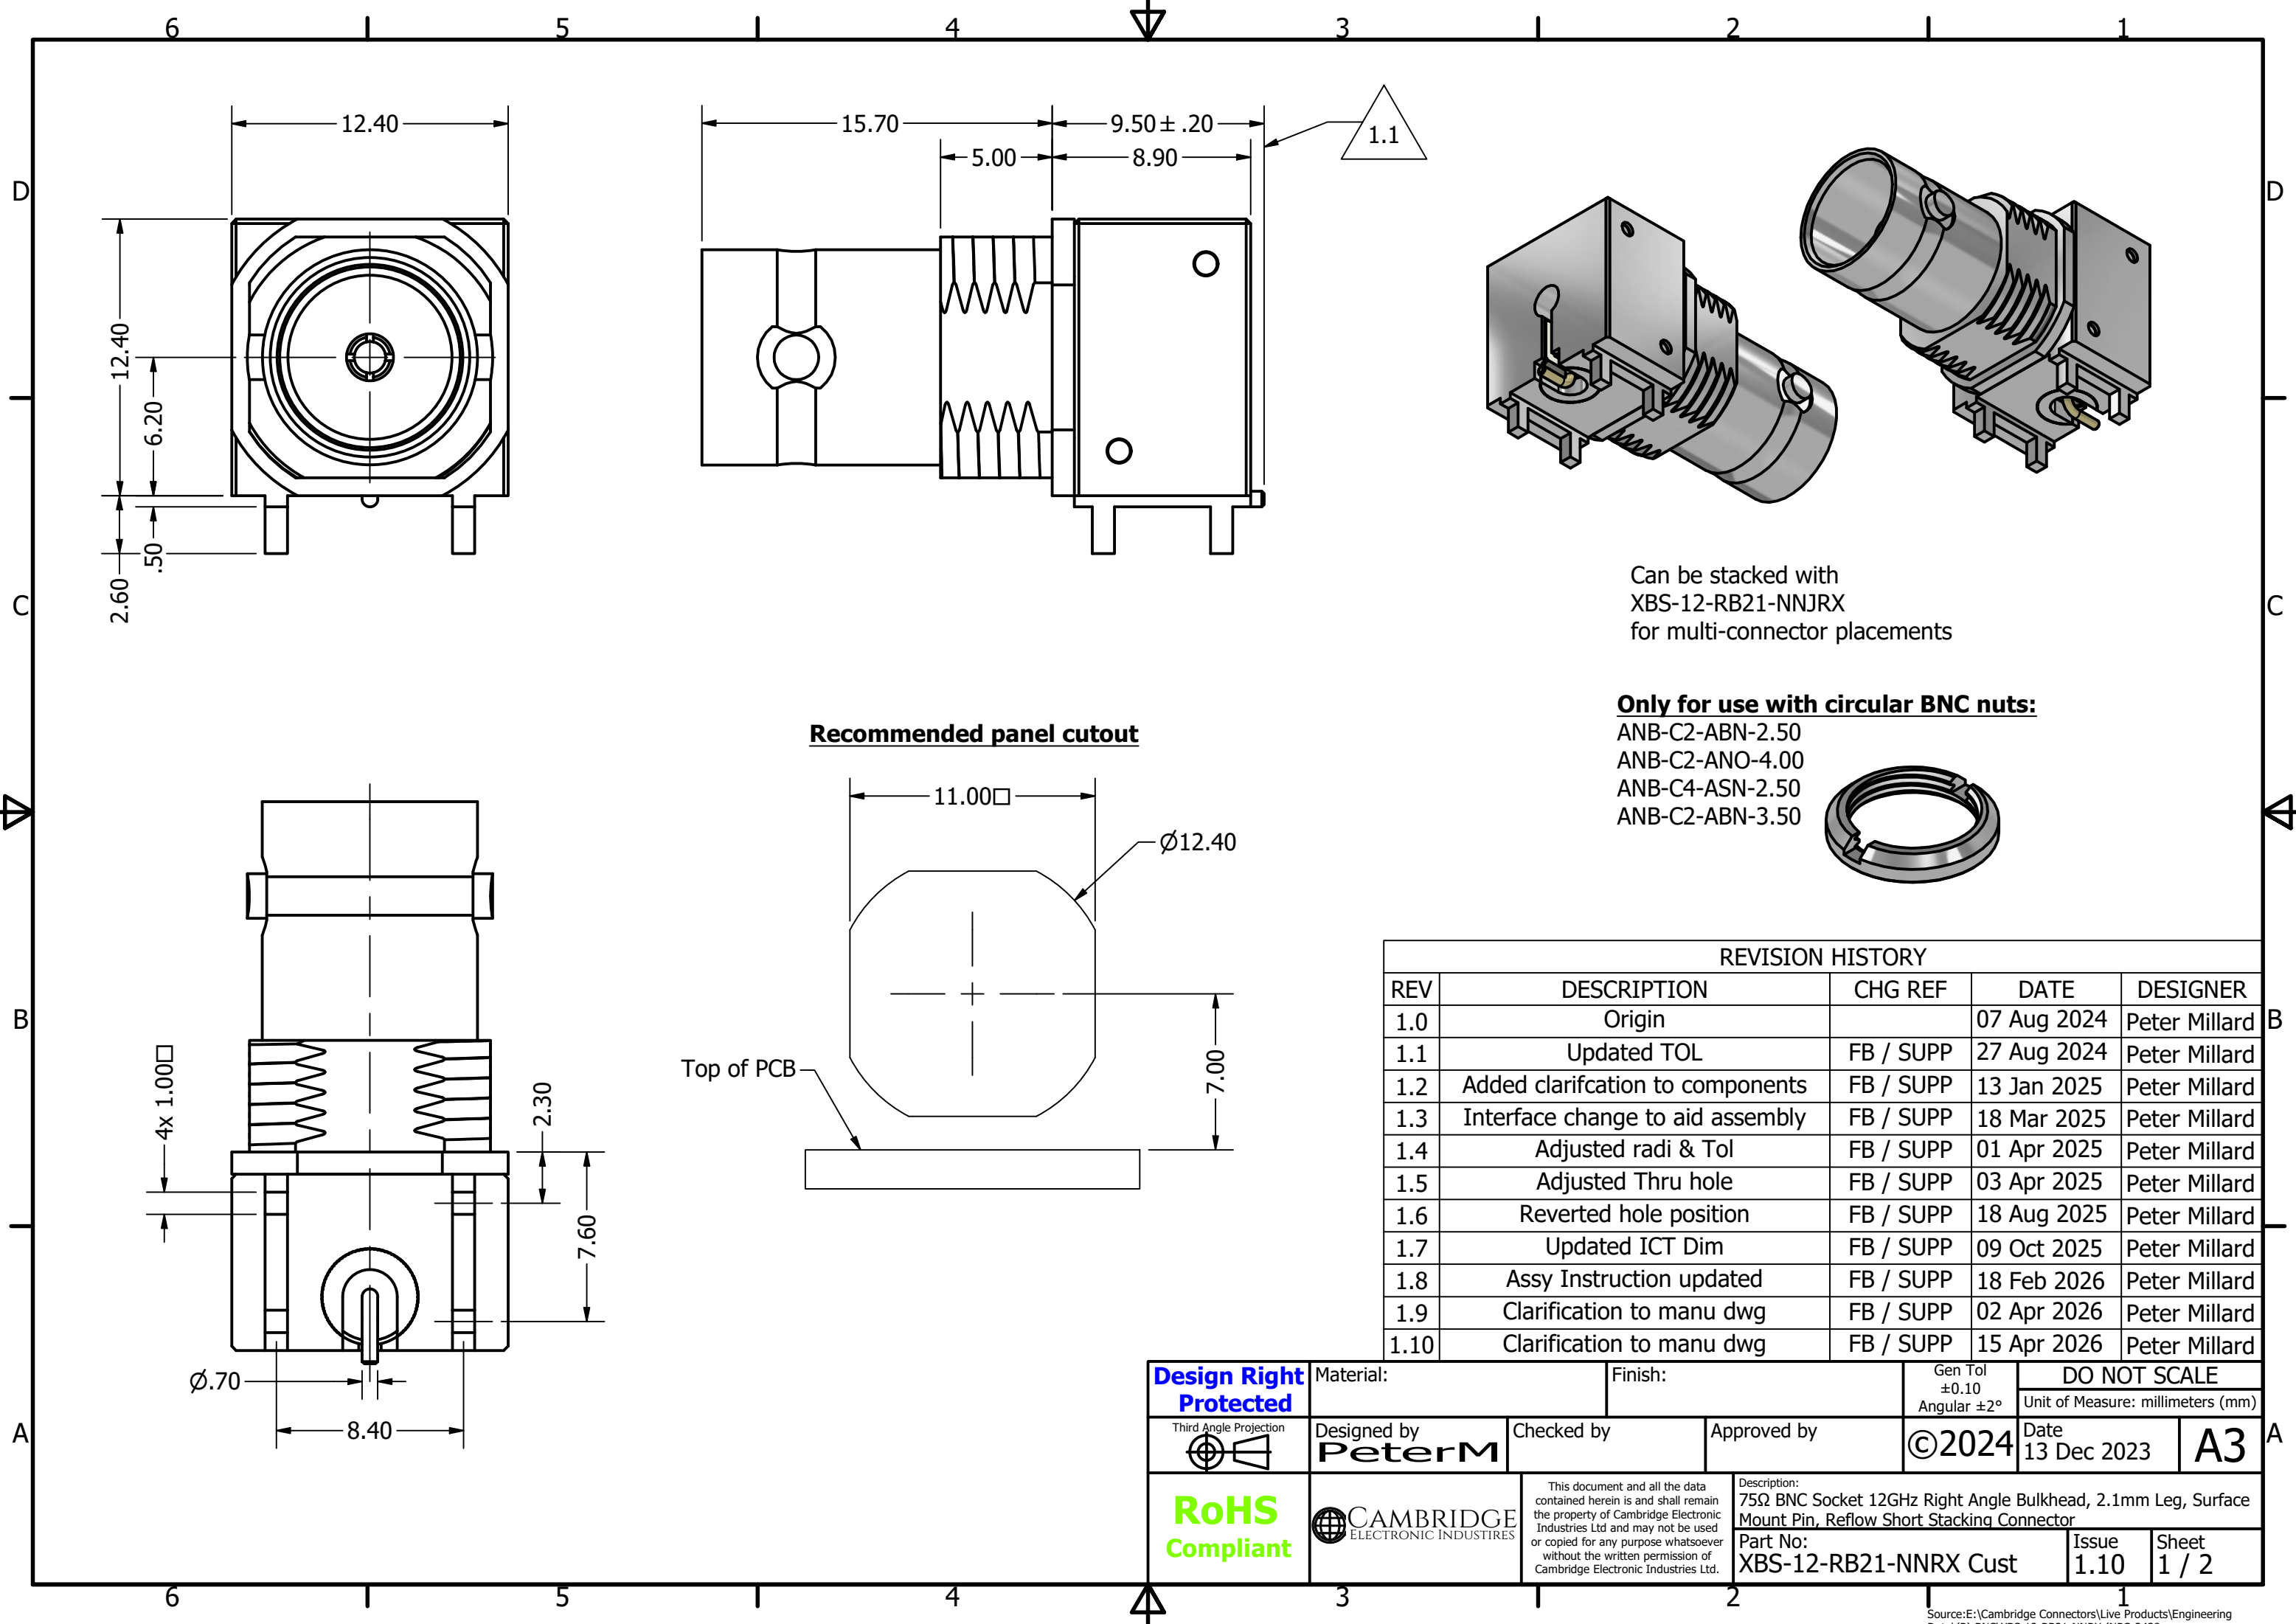

Can be stacked with
XBS-12-RB21-NNJRX
for multi-connector placements

Recommended panel cutout

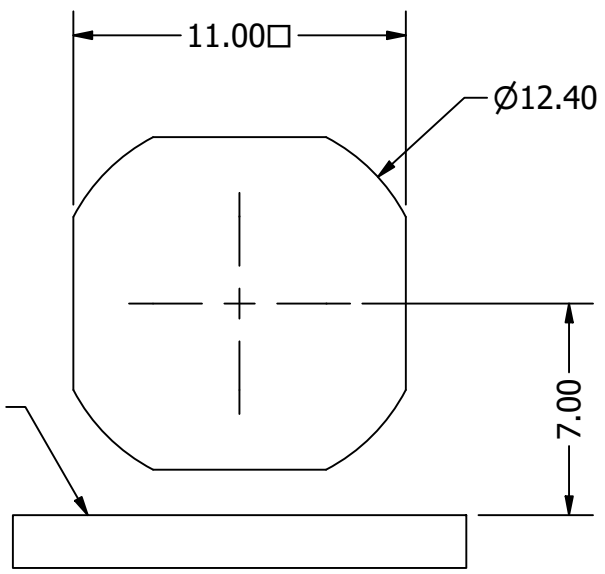

Only for use with circular BNC nuts:

- ANB-C2-ABN-2.50
- ANB-C2-ANO-4.00
- ANB-C4-ASN-2.50
- ANB-C2-ABN-3.50



REVISION HISTORY				
REV	DESCRIPTION	CHG REF	DATE	DESIGNER
1.0	Origin		07 Aug 2024	Peter Millard
1.1	Updated TOL	FB / SUPP	27 Aug 2024	Peter Millard
1.2	Added clarification to components	FB / SUPP	13 Jan 2025	Peter Millard
1.3	Interface change to aid assembly	FB / SUPP	18 Mar 2025	Peter Millard
1.4	Adjusted radi & Tol	FB / SUPP	01 Apr 2025	Peter Millard
1.5	Adjusted Thru hole	FB / SUPP	03 Apr 2025	Peter Millard
1.6	Reverted hole position	FB / SUPP	18 Aug 2025	Peter Millard
1.7	Updated ICT Dim	FB / SUPP	09 Oct 2025	Peter Millard
1.8	Assy Instruction updated	FB / SUPP	18 Feb 2026	Peter Millard
1.9	Clarification to manu dwg	FB / SUPP	02 Apr 2026	Peter Millard
1.10	Clarification to manu dwg	FB / SUPP	15 Apr 2026	Peter Millard

Design Right
Protected

Third Angle Projection

RoHS
Compliant

Material:

Designed by
PeterM

Finish:

Checked by

This document and all the data contained herein is and shall remain the property of Cambridge Electronic Industries Ltd and may not be used or copied for any purpose whatsoever without the written permission of Cambridge Electronic Industries Ltd.

Gen Tol
±0.10
Angular ±2°

DO NOT SCALE

©2024

Description:
75Ω BNC Socket 12GHz Right Angle Bulkhead, 2.1mm Leg, Surface Mount Pin, Reflow Short Stacking Connector

Unit of Measure: millimeters (mm)

Date
13 Dec 2023

Part No:
XBS-12-RB21-NNRX Cust

Issue
1.10

Sheet
1 / 2

