CAMBRIDGE ELECTRONIC INDUSTRIES

M12 (X) Pin A Code Plug, Front Fastening (PG9/M16 Thread), Straight PCB Solder, Shielded

Part Number CC12-XXP-FA07-PBSX
Issue 1.1


General Description


The CC12-XXP-FA07-PBSX is an M12 circular plug connector which is available with 2 to 12 pins and a shielding pin. The connector is an A coding and is supplied with either a PG9 or M16 lock thread nut. The connector features straight pins to the rear for mounting directly to a PCB. With IP67 waterproof rating, these small circular connectors can be used for sensors and power connections as well as in PROFINET, field bus, CAN bus and DeviceNet applications.



Specification	
Coding	A
Contact	2 to 12 Pins
Current Rating	4A AC/DC (2 to 5 Pins) 2A AC/DC (6 to 8 Pins) 1.5A AC/DC (9 to 12 Pins)
Voltage Rating	250V AC/DC (2 to 4 Pins) 60V AC/DC (5 Pins) 30V AC/DC (6 to 12 Pins)
Contact Resistance	≤5mΩ
Insulation Resistance	≥100MΩ
Withstanding Voltage	500V AC/Minute
Operating Temperature	-40°C to +100°C
Waterproof Rating	IP67
Material Plating	
Insulator	UL94V-0 Black
Connector Contacts	Brass Gold Plated
Shell	Brass Nickel Plated
Seal Ring	Red Silicone
Connector Nut	Brass Nickel Plated

CC12-XXP-FA07-PBSX
- Panel Lock Thread 1: PG9; 2:M16
- With Shielding
- Panel Mount PCB Dip
- Die Casting
- Front Fastened A Coding
- Plug
- No. of Positions
- M12

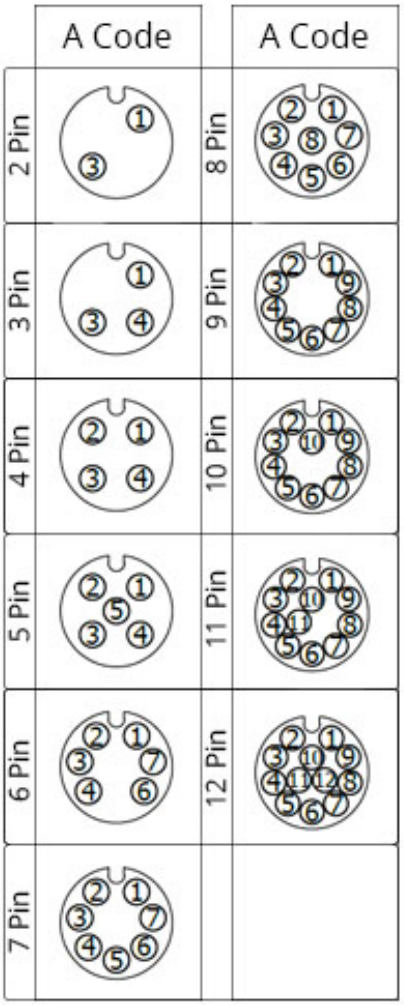

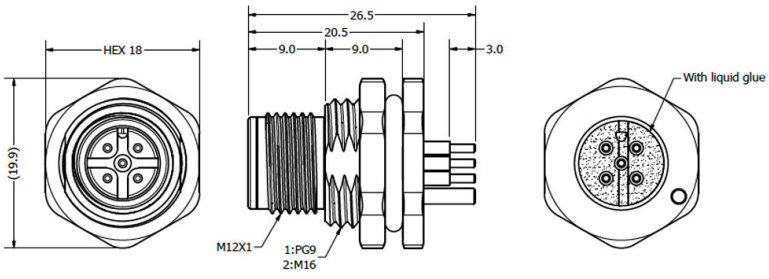

Drawing Issue 1.1

Tel: +44 (0)1223 860041
Tel: +44 (0)1223 863377
Website: www.CambridgeElectronics.com
Email: sales@cambridgeelectronics.com